

**Fused Terminal Blocks - continued**

**1-5 pole terminal block with 5 x 20mm fuse holder**



- 1-5 pole terminal block with 5 x 20mm fuse holder to IEC257
- Interlocking fuse holder CFTBN/1
- IP20 finger protection
- 2.5mm<sup>2</sup> cable entry with wire protector
- Supplied c/w earth screw & washer
- Wire protector standard on fused terminal
- Approvals **Semko, Femko, VDE, IMQ, Nemko & UL** Recognised


H = 28.0, W = 20.0 terminal strip, W = 28.0  
 Maximum Voltage 450V ac  
 Max Current Rating 13A/20A  
 Working Temperature Range -20°C to 120°C  
 Max Short Duration Temp 110°C  
 Bush Brass  
 Spring Zinc plated Steel  
 Housing Polypropylene UL94V-2  
 Colour White

232107

No. Poles	Mfrs. List No.	Order Code	1+	10+	50+	100+
<b>Without Earth Screw</b>						
1	CFTBN/1	<b>388-2792</b>	51.00	41.00	34.00	31.00
2	CFTBN/2	<b>388-2809</b>	54.00	42.00	36.00	32.00
<b>With Earth Screw</b>						
3	CFTBN/3	<b>388-2810</b>	61.00	50.00	42.00	37.00
4	CFTBN/4	<b>388-2822</b>	81.00	62.00	53.00	47.00
5	CFTBN/5	<b>388-2834</b>	89.00	69.00	58.00	51.00

**Plug In Terminal Blocks**

**Nylon Plug and Socket 12 Way 10A - with Standoffs**

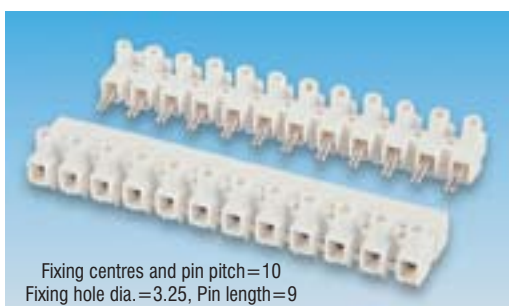

Fixing centres and pin pitch=10  
 Fixing hole dia.=3.25, Pin length=9

- A non-reversible plug and shrouded socket
- Suitable for use where cables need to be quickly disconnected
- Ribbed standoffs to meet creepage and clearance requirements
- Approval, **UL** Recognised

Max working voltage 380V ac  
 Current rating 10A  
 Temperature range -60°C to +110°C  
 Housing White nylon 6.6, **UL94V-2**  
 Contacts Brass, Nickel  
 Screws M3Steel, zinc plated  
 Maximum wire size 2.5mm<sup>2</sup>

209013

Order Code	1+	50+	100+	250+	+
<b>117-8400</b>	263.00	238.00	224.00	192.00	--

**Barrier Terminal Blocks**

**Screw to Screw, Screw to Tag 3, 4 and 12 way 15A - High Barrier**



H=12.8, W=3 way (46.5), 4 way (57.7), 12 way (133), D=22.3  
 Fixing centres=7.9x4.3 diax3 way (38.1), 4 way (47.6) 12 way (123.8), Max. fork width=7.5

Max working voltage 750V ac  
 Current rating 15A  
 Temperature range -25°C to +85°C  
 Housing Black, Glass filled polyester  
 Screw terminations 4BA  
 Tags L=11.5, W=4.0, Th=0.6

209015

No. of Ways	Order Code	1+	10+	50+	100+	+
<b>Screw to Screw Terminals</b>						
3	<b>105-370</b>	112.00	98.00	87.00	71.00	--
3	<b>118-8711</b>	112.00	98.00	87.00	71.00	--
4	<b>105-371</b>	108.00	99.00	91.00	86.00	--
4	<b>118-8713</b>	108.00	99.00	91.00	86.00	--
12	<b>105-372</b>	325.00	285.00	253.00	208.00	--

No. of Ways	Order Code	1+	10+	50+	100+	+
<b>Screw to Screw Terminals</b>						
12	<b>118-8714</b>	325.00	285.00	253.00	208.00	--
<b>Screw to Tag Terminals</b>						
3	<b>105-373</b>	102.00	90.00	79.00	65.00	--
3	<b>118-8715</b>	102.00	90.00	79.00	65.00	--
4	<b>105-374</b>	132.00	116.00	102.00	84.00	--
4	<b>118-8716</b>	132.00	116.00	102.00	84.00	--
12	<b>105-375</b>	273.00	239.00	213.00	174.00	--
12	<b>118-8717</b>	273.00	239.00	213.00	174.00	--

**Modular Screw to Screw and Screw to Tag**



H=12.7, W=(min 2 way=36.56 + multiples of 9.52 way), D=22.25  
 Fixing centres=7.92x4.32 diax(2 way) 28.56 + multiples of 9.52, Max fork width=7.5

- Screw to screw and screw to tag
- 2 and 3 way connector options, combines in multiples to extend number of ways
- Mounting support required every 15 terminal on long rows
- Easy snap together segments

Max working voltage 500V ac or dc  
 Contact material Brass, Nickel  
 Current rating 15A  
 Temperature range -55°C to +100°C  
 Body material Black Glass filled polyester  
 Screw terminations 4BA  
 Wire size 16AWG (max)

209016

No. of Ways	Order Code	1+	10+	50+	100+	+
<b>Screw to Screw</b>						
2	<b>105-281</b>	103.00	90.00	80.00	65.00	--
2	<b>118-8702</b>	103.00	90.00	80.00	65.00	--
3	<b>105-282</b>	126.00	111.00	99.00	81.00	--
3	<b>118-8704</b>	126.00	111.00	99.00	81.00	--
<b>Screw to Solder Tag</b>						
2	<b>105-674</b>	74.00	--	--	--	--
2	<b>118-8721</b>	74.00	--	--	--	--
3	<b>105-675</b>	130.00	--	--	--	--
3	<b>118-8722</b>	96.00	--	--	--	--
<b>Order Multiple=5</b>						
Barrier junction	<b>105-283</b>	20.00	19.00	18.00	15.00	--
Barrier junction	<b>118-8705</b>	20.00	19.00	18.00	15.00	--
End cap	<b>105-284</b>	30.00	--	--	--	--
End cap	<b>118-8706</b>	24.00	--	--	--	--

**Screw to Screw 12 Way 15A**



H=11.5, W=17, L=133.4  
 Pitch=9.6, Fixing=124.8x7.9x3.9 dia, Max. fork width=7.5

Max working voltage 380V ac  
 Current rating 15A  
 Maximum temperature 100°C  
 Housing Polyester  
 Screw terminations 4BA Pan head slotted

209019

Mfrs. List No.	Order Code	1+	50+	200+	500+
L1792A	<b>314-973</b>	874.00	705.00	632.00	569.00

**12 Way 15A 9.6mm Pitch**



H=11.5, W=17, L=133.4, Pitch=9.6, Fixing=124.8x7.9, Dia, Pin=1.0x0.07

- Screw termination and right angled, through chassis or PCB termination

Maximum Working Voltage 380V ac  
 Current Rating 15A  
 Maximum Temperature 100°C  
 Housing Black, polycarbonate  
 Screw Terminations 4BA Pan head slotted

231770

Mfrs. List No.	Order Code	1+	50+	200+	500+
L1795A	<b>121-8802</b>	672.00	542.00	484.00	440.00