

Pack Quantity = 1
No. of Mfrs.

Ways	List No.	Order Code	1+	10+	50+	100+	+
1.25mm ZIF R/A through hole							
14	39-51-3143	307-8565▲‡	85.00	72.00	60.00	46.00	--
14	39532144	978-6031●	85.00	72.00	60.00	46.00	--
16	39532164	978-6058●	106.00	89.00	74.00	53.00	--
20	39-51-3203	307-8589▲‡	113.00	95.00	80.00	60.00	--
20	39532204	978-6074●	113.00	95.00	80.00	57.00	--
30	39532304	978-6082●	160.00	135.00	113.00	81.00	--
1.25mm ZIF straight through hole							
4	39532045	978-5965●	31.00	26.00	22.00	16.00	--
6	39532065	978-5981●	40.00	34.00	29.00	20.00	--
8	39532085	978-6007●	50.00	42.00	35.00	25.00	--
10	39532105	978-6023●	59.00	50.00	42.00	30.00	--
14	39532145	978-6040●	77.00	65.00	54.00	39.00	--
16	39-51-3164	307-8656▲‡	87.00	73.00	61.00	46.00	--
16	39532165	978-6066●	87.00	73.00	61.00	44.00	--
1.25mm Non-ZIF R/A through hole							
4	52044-0445	307-8668‡	30.00	25.00	17.00	14.00	--
4	52044-0445	101-2177●	30.00	25.00	16.00	12.00	--
6	52044-0645	307-8670‡	27.00	23.00	15.00	11.00	--
8	52044-0845	307-8681‡	41.00	34.00	23.00	19.00	--
8	52044-0845	101-2178●	41.00	34.00	23.00	17.00	--
10	52044-1045	307-8693‡	46.00	39.00	26.00	19.00	--
14	52044-1445	307-8700‡	58.00	49.00	32.00	24.00	--
14	52044-1445	101-2179●	58.00	49.00	32.00	24.00	--
16	52044-1645	307-8711‡	63.00	53.00	37.00	30.00	--
16	52044-1645	101-2180●	63.00	53.00	34.00	26.00	--
20	52044-2045	101-2181●	75.00	63.00	41.00	30.00	--
1.25mm Non-ZIF straight							
4	52045-0445	307-8759‡	27.00	23.00	16.00	14.00	--
6	52045-0645	307-8760‡	27.00	23.00	16.00	13.00	--
6	52045-0645	101-2182●	27.00	23.00	15.00	11.00	--
14	52045-1445	307-8796‡	31.00	26.00	18.00	15.00	--
14	52045-1445	101-2183●	31.00	26.00	17.00	13.00	--
16	52045-1645	307-8802‡	58.00	49.00	34.00	28.00	--
16	52045-1645	101-2184●	58.00	49.00	32.00	24.00	--
30	52045-3045	307-8826‡	76.00	64.00	44.00	36.00	--
30	52045-3045	101-2185●	76.00	64.00	42.00	31.00	--
40	52045-4045	307-8838‡	97.00	82.00	56.00	46.00	--

Primo-Flex™ Jumper
1mm Pitch for FFC/FPC Connectors



- Allows a light and small planar structure to accommodate a high density wiring solution
- Single connector interface eliminates crimping of connector on ends of cable
- Primo-Flex™ can be folded and will retain shape providing flexibility and reliability
- Replaces flat cable and wire harnesses saving space and cost
- FFC products allow a high temperature environment up to 105 degree C to meet Industry Standard requirements.
- Type A, contacts on the same side



Length	152mm / 6"	Operating temperature	-40°C to +105°C
Current Rating	1.2	Max. Voltage	60V

No. of Ways	Mfrs. List No.	Order Code	1+	50+	+
6	982670211	107-9966●	67.00	65.00	--
8	982670233	107-9968●	72.00	67.00	--
10	982670255	107-9969●	82.00	76.00	--
12	982670277	107-9970●	85.00	78.00	--
14	982670299	107-9971●	91.00	84.00	--
16	982670321	107-9972●	96.00	89.00	--
18	982670343	107-9973●	102.00	96.00	--
20	982670365	107-9974●	104.00	97.00	--
22	982670387	107-9975●	107.00	98.00	--
24	982670409	107-9976●	133.00	125.00	--
26	982670431	107-9977●	142.00	131.00	--
28	982670453	107-9978●	144.00	132.00	--
30	982670475	107-9981●	146.00	136.00	--

FPC Connectors
0.5mm ZIF, Rotary lock type




- Unique rotary lock improves efficiency during FPC mounting
- Double sided contacts maintain stable contact force
- Eliminates the need for upper and lower contact discrimination

Contact rating	0.5A	Housing	Polyamide plastic
Voltage rating	50V dc	Slider	Polyamide plastic
Contact Resistance	30mΩ(max)	Contacts	Copper/nickel alloy
Insulation resistance	100MΩ (min)		

227349

No. of Ways	Mfrs. List No.	Order Code	5+	25+	50+	100+	+
10	XF2H-1015-1	309-1491▲	50.00	46.00	42.00	36.00	--
20	XF2H-2015-1	309-1508▲	64.00	57.00	51.00	44.00	--
24	XF2H-2415-1	309-1510▲	75.00	68.00	61.00	51.00	--
30	XF2H-3015-1	309-1521▲	88.00	78.00	71.00	60.00	--
35	XF2H-3515-1	309-1533▲	94.00	84.00	77.00	66.00	--
40	XF2H-4015-1	309-1545▲	101.00	92.00	82.00	70.00	--
45	XF2H-4515-1	309-1557▲	113.00	102.00	93.00	78.00	--
50	XF2H-5015-1	309-1569▲	116.00	106.00	97.00	81.00	--

FPC Connectors - XF2M Series
0.5mm ZIF, Rotary Backlock type

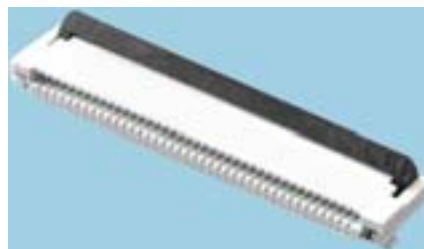

- Unique rear locking improves efficiency during FPC mounting
- Double sided contact structure for reduced component size
- Ideal for space-sensitive applications
- Applicable FPC thickness is 0.3mm



Contact rating	0.5A	Housing	LCP Resin, Natural
Voltage rating	50V dc	Slider	LCP Resin, Black
Contact Resistance	40mΩ(max)	Contacts	Gold Plated
Insulation resistance	100MR (at 250V DC)		

422870

No. of Ways	Mfrs. List No.	Order Code	5+	25+	50+	100+	+
10	XF2M10151A	111-2555●	50.00	46.00	42.00	36.00	--
20	XF2M20151A	111-2558●	64.00	57.00	51.00	44.00	--
24	XF2M24151A	111-2559●	75.00	68.00	61.00	51.00	--
30	XF2M30151A	111-2560●	88.00	78.00	71.00	60.00	--
35	XF2M35151A	111-2561●	94.00	84.00	77.00	66.00	--
40	XF2M40151A	111-2562●	101.00	92.00	82.00	70.00	--
45	XF2M45151A	111-2563●	113.00	102.00	93.00	78.00	--
50	XF2M50151A	111-2564●	116.00	106.00	97.00	81.00	--

Flat Flexible Cable



0.5mm, 1.0mm and 1.25mm Pitch



- Flat flexible cable for use with FFC/ FCP range of connectors
- Reinforcing tape bonded to underside for cable to ensure easy and accurate insertion into the connector
- Overall length 210mm

Insulation Material	Polyester (Flame Resistant)	Max operating temperature	80°C
---------------------	-----------------------------	---------------------------	------

209525

No. of Ways	Order Code	1+	25+	+	+	+
0.5mm Pitch						
10	329-5000●	124.00	112.00	--	--	--
14	329-5011●	110.00	98.00	--	--	--
16	329-5023●	126.00	117.00	--	--	--
20	329-5035●	142.00	127.00	--	--	--
24	335-2640●	158.00	143.00	--	--	--
30	329-5047●	176.00	161.00	--	--	--
35	335-2651●	191.00	177.00	--	--	--
40	335-2663●	217.00	190.00	--	--	--
45	335-2675●	223.00	195.00	--	--	--
50	335-2687●	228.00	199.00	--	--	--
1mm Pitch						
10	329-5059●	56.00	54.00	--	--	--
14	329-5060●	64.00	58.00	--	--	--
16	329-5072●	71.00	66.00	--	--	--
20	329-5084●	82.00	77.00	--	--	--
26	329-5096●	101.00	96.00	--	--	--
30	329-5102●	132.00	126.00	--	--	--
1.25mm Pitch						
4	329-5114●	42.00	--	--	--	--
6	329-5126●	42.00	44.00	--	--	--
8	329-5138●	45.00	42.00	--	--	--
10	329-5140●	50.00	46.00	--	--	--

Compliant Non-compliant Limited stock - RoHS replacement available

