


No. of Ways	Order Code	1+	10+	25+	50+	+	+
<b>Male Housing</b>							
<b>Female Housing</b>							
9	307-9314	68.00	62.00	59.00	44.00	--	--
15	307-9326	71.00	65.00	61.00	46.00	--	--
25	307-9338	76.00	70.00	67.00	49.00	--	--
37	307-9340	85.00	78.00	75.00	55.00	--	--
50	307-9351	141.00	130.00	124.00	92.00	--	--
<b>100 Per Pack</b>		<b>Price Per Pack</b>					
		1+	10+	25+			
<b>Wire Wrap Contacts</b>							
Male	307-9363	1,314.00	1,051.00	876.00			
Female	307-9375	2,630.00	2,104.00	1,753.00			
<b>Crimp Contacts</b>							
Male	307-9387	708.00	566.00	471.00			
Female	307-9399	1,150.00	919.00	766.00			
<b>Straight PCB Contacts</b>							
Male	307-9405	1,150.00	919.00	766.00			
Female	307-9417	1,188.00	950.00	792.00			
<b>Solder Bucket Contacts</b>							
Male	307-9429	730.00	584.00	486.00			
Female	307-9430	918.00	735.00	612.00			
<b>Tooling</b>		<b>Price Each</b>					
		1+					
Crimp Tool	307-9442	10,606.00					
Insertion Tool	307-9454	595.00					
Extraction Tool	307-9466	491.00					
Replacement tip for 702-3	307-9478	120.00					

**Gender Changers**

**Miniature Gender Changers**

9, 15, 15HD, 25, 37, Centronics

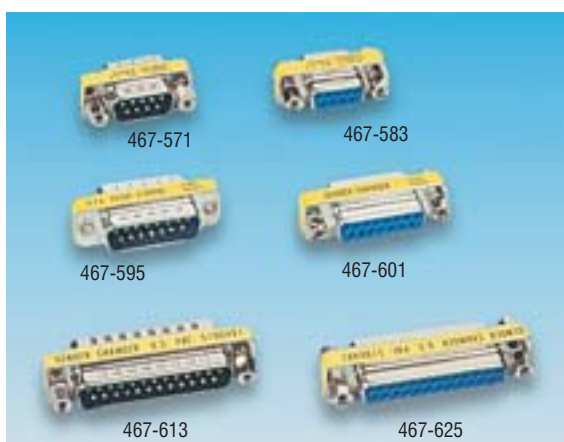


- A range of miniature low cost gender changers featuring pin to pin wiring and housed in a compact metal enclosure, which provides RFI/EMI shielding
- Gender changers are available in 9, 15, 25, 37 way and Centronics versions and are supplied with screw locks.

221631

No. of Ways	Order Code	1+	10+	50+
<b>Standard D Types</b>				
9 male-male	467-571	454.00	404.00	328.00
9 female - female	467-583	454.00	404.00	328.00
15 male - male	467-595	687.00	578.00	476.00
15 female - female	467-601	687.00	578.00	476.00
25 male - male	467-613	454.00	404.00	328.00
25 female - female	467-625	454.00	404.00	328.00
37 male - male	118-3332	617.00	540.00	433.00
37 female - female	118-3334	617.00	540.00	433.00
<b>High Density</b>				
15 (SVGA) male - male	118-3337	493.00	433.00	362.00
15 (SVGA) female - female	118-3338	493.00	433.00	362.00
<b>Centronics</b>				
36 male - male	118-3335	596.00	519.00	409.00
36 female - female	118-3336	596.00	519.00	409.00

**Filtered 'D'**

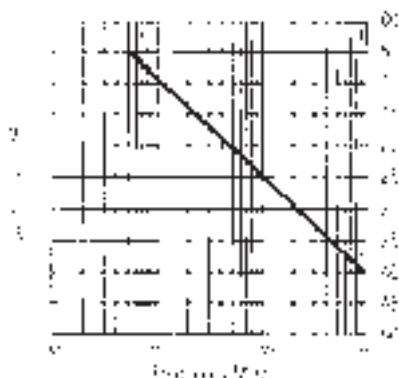

- Filtered tin and dimple 'D' connectors with turned pin contacts
- Designed to make equipment compatible with **BS, VDE, FCC** and **FTZ** regulations in respect of EMI/RFI emissions
- Filtering is achieved by means of a 1nF feed through ceramic capacitor on each contact which is fully encapsulated within the connector shell for maximum resistance to hazardous environments
- Soldering instructions included

Typical performance relates to 50Ω system **Mil Std 220**  
Capacitance - 1nF nominal 1KHz 0.1rms

Contact rating	5A @60°C	Housing	Steel, Tin plating
Contact resistance	5mΩmax	Insulator	Grey ployester <b>UL94V-0</b>
Insulation resistance	5000MΩmin	Rear encapsulation	Blue epoxy resin
Working voltage	200V dc/ac peak	Contacts	Turned Copper alloy
Capacitance	1nF @ 1KHz 0.1 rms		Gold over Nickel
Temperature range	-55°C to +85°C	Earthing strap (90°PCB)	Steel, Tin plating
Mating cycles	100	Riv-nut (90°PCB)	4-40 NC Thread

209778

**Filtered Solder Bucket 'D'**



Mfrs. List No.	FDE-9PT12/1 = 428-966, FDB-25PT12/1 = 428-980, FDA-15ST2/1 = 429-016, FDC-37ST2/1 = 429-030	FDA15PT12/1 = 428-978, FDE-9ST2/1 = 429-004, FDB-25ST2/1 = 429-028,
----------------	--	---

209781

No. of Ways	Order Code	1+	10+	25+	50+	+	+
<b>Plugs</b>							
9	428-966	502.00	479.00	476.00	438.00	--	--
9	111-4110	502.00	479.00	476.00	438.00	--	--
15	428-978	678.00	641.00	609.00	541.00	--	--
15	111-4111	678.00	641.00	609.00	541.00	--	--
25	428-980	1,093.00	1,044.00	1,037.00	956.00	--	--
25	111-4112	1,093.00	1,044.00	1,037.00	956.00	--	--
<b>Sockets</b>							
9	429-004	544.00	519.00	516.00	476.00	--	--
9	111-4113	544.00	519.00	516.00	476.00	--	--
15	429-016	759.00	728.00	721.00	663.00	--	--
15	111-4114	759.00	728.00	721.00	663.00	--	--
25	429-028	1,339.00	1,265.00	1,201.00	1,133.00	--	--
25	111-4115	1,339.00	1,265.00	1,201.00	1,133.00	--	--
37	429-030	1,545.00	1,468.00	1,393.00	1,315.00	--	--
37	111-4117	1,545.00	1,468.00	1,393.00	1,315.00	--	--

**Filtered 90° PCB 'D' Earthing Strap and Riv-Nuts**



Mfrs. List No.	FDEB-9P1AENT12/1 = 429-120, FDDB-25P1AENT12/1 = 429-144, FDEB-9S1AENT12/1 = 429-120, FDDB-25S1AENT12/1 = 429-181,	FDAB-15P1AENT12/1 = 429-132, FDCB-37P1AENT12/1 = 429-156, FDAB-15S1AENT12/1 = 429-170, FDCB-37S1AENT12/1 = 429-193
----------------	--	---

209782

No. of Ways	Order Code	1+	10+	25+	50+	+	+
<b>Plugs</b>							
9	429-120	722.00	668.00	646.00	594.00	--	--
9	111-4127	722.00	668.00	646.00	594.00	--	--
15	429-132	858.00	823.00	780.00	731.00	--	--
15	111-4131	858.00	823.00	780.00	731.00	--	--
25	429-144	959.00	956.00	951.00	899.00	--	--
25	111-4132	959.00	956.00	951.00	899.00	--	--
37	429-156	1,679.00	1,613.00	1,573.00	1,493.00	--	--
37	111-4133	1,679.00	1,613.00	1,573.00	1,493.00	--	--
<b>Sockets</b>							
9	429-168	796.00	720.00	689.00	640.00	--	--
9	111-4134	796.00	720.00	689.00	640.00	--	--
15	429-170	939.00	900.00	863.00	800.00	--	--

9

Connectors - Signal & Data

Compliant  
● Non-compliant  
▲ Limited stock - RoHS replacement available  
**RoHS**