


Subrack Accessories - 'KM6-II'

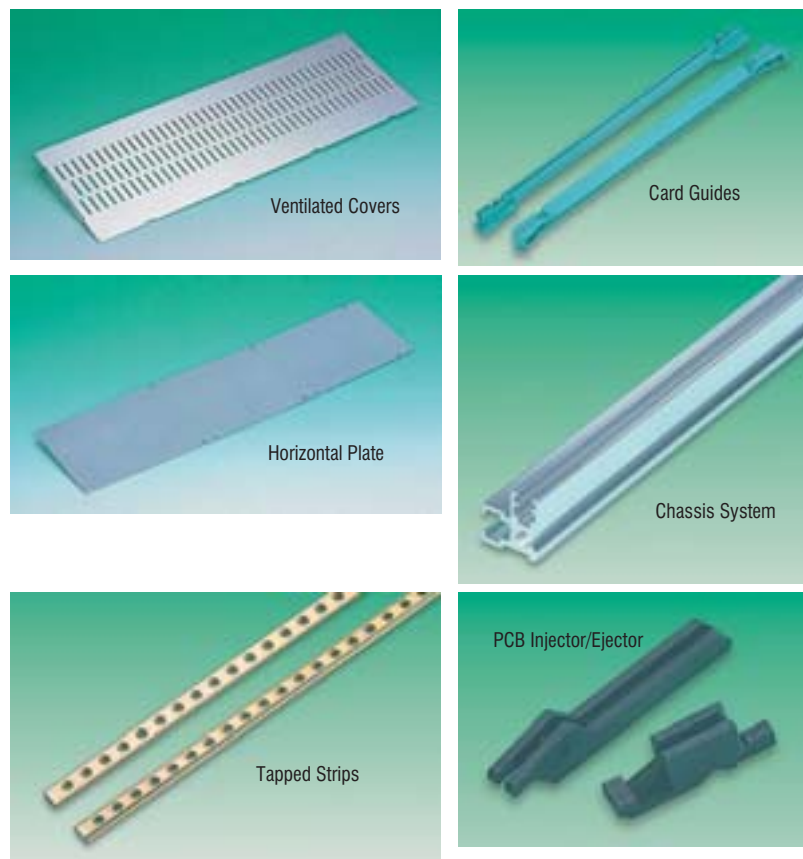

Ventilated Covers

- Provides protection against debris falling into the subrack
- Fitted after assembly, can be removed separately

Card Guides

- Available in 160mm or 220mm lengths. Suitable for 1.6mm thick PCBs
- Addition of tapped strip in front extrusion prevents movement of guides in vibration conditions

Backplane Spacer

- Required for use with Eurocard plug-in units to maintain correct connector geometry
- Two required for 3U application and four for 6U

DIN 41 612 Mounting Frame

- Enables connectors to be wired remotely and then fixed to backplane
- May be cut down in length for more localised applications

PCB Injector/Ejector

- Provides assistance with insertion/withdrawal of Eurocards with multiple connectors

Chassis System

- For mounting additional plates into a subrack
- For carrying additional components such as power supplies

224466

Size	Pack Qty.	Mftrs. List No.	Order Code	1+	5+	10+
Ventilated Covers						
160mm	2	950-202625L	645-035	1,247.00	1,227.00	1,166.00
220mm	2	950-202626J	645-047	1,488.00	1,441.00	1,370.00
Card Guides						
160mm 1.6	10	950-232662J	644-973	570.00	534.00	504.00
220mm 1.6	10	950-232663G	644-985	610.00	576.00	545.00
Tapped Strip						
84HP	1	950-202001E	644-997	340.00	314.00	273.00
Cheese head screws						
M2.5 x 5	100	173-202579H	645-000	496.00	463.00	440.00
Back Plane Spacer						
84HP	1	950-10014H	645-011	172.00	161.00	145.00
DIN 41612						
84HP	1	950-34244C	645-023	958.00	925.00	879.00
PCB Injector/Ejector						
Pack	10 prs	950-251174D	645-059	1,627.00	1,547.00	1,465.00
Chassis System						
84HP	1	956-242703L	645-060	493.00	464.00	440.00
Fixing Screws						
M4 12mm	100	956-243261A	645-072	812.00	765.00	725.00
Horizontal Plates						
84HP	1	956-242709K	645-084	383.00	361.00	349.00
Vertical Plates						
3U 84HP	1	956-242706E	645-096	461.00	433.00	420.00

482.60mm (19") Anodised Aluminium Panels



- 3mm aluminium NS4 half hard
- Finished in anodised (WP) etch and anodised

203440

Height	Mftrs. List No.	Order Code	1+	10+	25+	+
1U (44.45)	50-0767G	929-773	716.00	658.00	637.00	--
2U (88.9)	50-0768B	929-785	1,094.00	1,004.00	972.00	--
3U (133.35)	50-0769H	929-797	1,405.00	1,293.00	1,248.00	--
4U (177.8)	50-0770C	929-803	1,754.00	1,606.00	1,552.00	--
6U (266.7)	50-0772D	929-815	2,458.00	2,260.00	2,184.00	--
8U (355.6)	50-225828F	929-827	2,913.00	2,683.00	2,590.00	--
9U (400.05)	50-24284D	929-839	3,148.00	2,896.00	2,797.00	--
12U (533.4)	50-24286G	929-840	4,045.00	3,720.00	3,593.00	--

Accessories

Thermostats



Normally open Normally closed
H=60, W=33, D=35

Temp. adjustment range: 0-60°C Switching Capacity: 6A@250Vac (resistive load)

224472

	Order Code	1+	10+	50+
Normally open	645-850	1,279.00	1,150.00	1,088.00
Normally closed	645-849	1,279.00	1,150.00	1,088.00

Crossflow Fan



H = 88, W = 461, D = 175

- Compact and efficient, suitable for 482.60mm (19") racking systems
- Supplied with a washable filter, internal filter guard, front grille and fixing brackets
- Fitted with ball bearings
- 90° airflow - air enters via filter at front and is blown vertically upwards

Voltage Vac	Power Watts	Airflow Cu ft/Min	Airflow Ltrs/sec	Noise dB(A) @ 1m	Operating Temperature	Mftrs. List No.
220/240	34	188.4	88.9	59	-25°C to +70°C	QR06A-2EM.38.AB

224468

Order Code	1+	5+	10+
899-940▲‡	10,111.00	9,103.00	8,710.00

Order Code	1+	5+	10+
960-1600●	10,111.00	9,103.00	8,710.00

13

Enclosures, Boxes & Fasteners

Compliant Non-compliant
● ▲ ‡ Limited stock - RoHS replacement available

RoHS