


Grommet Strip — Continued

Panel Edging

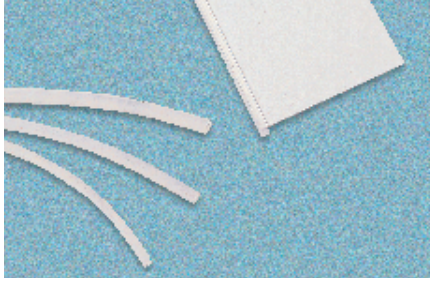

A versatile method of protection from raw metal edges of panels, racks and cabinets, grommet strip may be used along straight or formed curved edges. It may also be used to form internal protection for cut-outs, either round or rectangular.

Material Polythene Operating temperature -50°C to +50°C 139X

25m Lengths		Price Per Length				
Panel Thickness	Order Code	1+	5+	10+	25+	50+
1.0 – 1.1	.141-550					
1.5 – 2.0	.141-551					
2.5 – 3.3	.141-552					

Snap Bushing



A ridged black UL approved Nylon 66 bush. Push fitting to protect and insulate holes in metal chassis. To fit panel thickness 0.8mm to 3.2mm. Flame retardant to UL94V-2.

Mounting hole dia.	Bush hole dia.	Overall dia.	Overall depth	Order Code
9.5	6.3	12	10.3	582-062
13	8.2	14.5	10.3	582-074
15.9	12.2	18.6	10.3	582-086
18.9	14.3	21.5	10.3	582-098
22	17.3	23.8	11.5	582-104
25.1	19.1	28	11.5	582-116

100 Per Pack		Price Per Pack			
Mounting hole dia.	Order Code	1+	5+	10+	25+
10	582-062				
13	582-074				
16	582-086				
19	582-098				
22	582-104				
25	582-116				

Hole Plugs



Hole plug in black UL approved Nylon 66. Push fitting to blank unwanted holes. To fit panel thickness 0.8mm to 3.2mm. Flame etardent to UL94V-2.


Mounting hole dia.	Overall dia.	Overall depth	Order Code
10	13	10.5	582-128
13	16.9	10.5	582-130
16	19.8	10.5	582-141
19	22.9	10.5	582-153
22	24.9	11.3	582-165
25	28.3	11.5	582-177

100 Per Pack

Mounting hole dia.	Order Code	1+	Price Per Pack		
			5+	10+	25+
10	582-128				
13	582-130				
16	582-141				
19	582-153				
22	582-165				
25	582-177				

Cable Strain Relief

Strain Relief Bushes

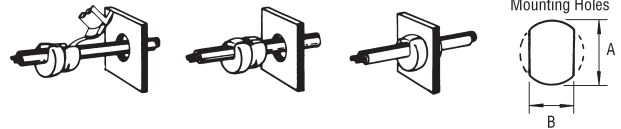

A range of UL recognised strain relief bushes to protect and securely anchor cables for through panel entry/exit. Manufactured in Black Nylon 66. Flame retardant to UL94V-2.

Cable Dia.	Mounting Holes		Panel Thickness	Order Code
	A	B		
6.2-7.4	12.7	11.5	0.5-1.6	581-902
6.2-7.4	12.7	11.5	1.8-2.5	581-914
7.6	12.7	11.8	1.8-2.3	581-926
7.4-8.2	15.9	14	0.5-1.6	581-938
7.4-8.2	15.9	14	1.9-3.2	581-940
8.2-9.2	15.9	14	0.5-1.6	581-951
8.2-9.2	15.9	14	1.9-3.2	581-963

170X

100 Per Pack

Cable Dia.	Order Code	1+	Price Per Pack		
			5+	10+	25+
6.2-7.4	581-902				
6.2-7.4	581-914				
7.6	581-926				
7.4-8.2	581-938				
7.4-8.2	581-940				
8.2-9.2	581-951				
8.2-9.2	581-963				

Assembly tool	.434-243	Price Each			
		1+	5+	10+	25+

Grommet Glands



These glands are supplied complete with a self-locking TY-RAP and when fitted form a weathertight seal. When assembled it is almost impossible to withdraw the cable.

Panel thickness 3.0 nominal

Panel Cut-out	Cable Diameter	Mftrs. List No.	Order Code
16	4 – 7	7401	303-318
20	7 – 12	7402	303-320
25	12 – 18	7403	303-331

135X

Mftrs. List No.	Order Code	1+	Price Each		
			10+	50+	100+
7401	303-318				
7402	303-320				
7403	303-331				

Cable Entry and Clamp



Current rating (terminals) **16A** Operating temperature -50°C to +85°C