

Hand Tool for Picoflex PF-50





- Parallel action hand tool with precision location nest and termination blades
- Can terminate feed-to or feed-through applications



CI214

	Mfrs. List No.	Order Code	Price Each
Hand Tool	69008-091	673-286	

Micro-Match

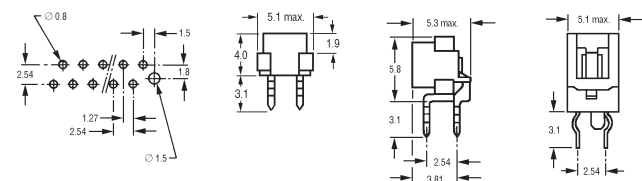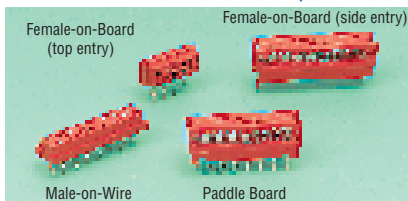

- One of the smallest systems available on 1.27mm
- Board and wire connectord
- Contact spring available in board connector
- Tin plated contact design
- UL Approved

Nominal voltage	100V 220V (double contact spacing)	Housing	Red thermoplastic polyester, GF UL94-V0
Current rating	1.5A max.	Contact	Phosphor bronze, tin plated
Contact resistance	10m OHM (max)		
Insulation resistance	1000M ohm (min)		
Temperature range	-40°C to +105°C		

CI339

0.05" (1.27mm) Pitch Female-on-Board

CI340

Order Multiple=10				Price Each		
No. of Ways	Mfrs. List No.	Order Code	10+	250+	500+	1000+
Top Entry						
4	7-215079-4	148-507				
6	7-215079-6	148-519				
8	7-215079-8	148-593				
10	8-215079-0	148-600				
12	8-215079-2	148-635				
14	8-215079-4	148-647				
16	8-215079-6	148-659				
18	8-215079-8	148-660				
20	9-215079-0	148-672				
Side Entry						
4	7-215460-4	148-684				
6	7-215460-6	148-696				
8	7-215460-8	148-751				
10	8-215460-0	148-763				
12	8-215460-2	148-799				
Order Multiple=1			1+	250+	500+	1000+
14	8-215460-4	148-891				
16	8-215460-6	148-908				
18	8-215460-8	148-910				
20	9-215460-0	149-020				

0.05" (1.27mm) Pitch Male-on-Wire



CI341

Order Multiple=10				Price Each		
No. of Ways	Mfrs. List No.	Order Code	10+	250+	500+	1000+
4	7-215083-4	149-032				
6	7-215083-6	149-068				
8	7-215083-8	149-070				
10	8-215083-0	149-081				
12	8-215083-2	149-093				
14	8-215083-4	149-135				
16	8-215083-6	149-147				
18	8-215083-8	149-184				
20	9-215083-0	149-251				

0.05" (1.27mm) Pitch Paddle Board



CI342

Order Multiple=10				Price Each		
No. of Ways	Mfrs. List No.	Order Code	10+	250+	500+	1000+
4	7-215570-4	149-299				
6	7-215570-6	149-317				
8	7-215570-8	149-366				
10	8-215570-0	149-380				
12	8-215570-2	149-445				
14	8-211570-4	149-597				
16	8-211570-6	149-810				
18	8-215570-8	149-822				
20	9-215570-0	149-834				


Hand Tool for Micro MaTch




CI343

	Mfrs. List No.	Order Code	Price Each
Hand Tool	734155-1	149-858	1+
Terminal Head	734024-1	149-895	

0.1" Pitch SIL Female Sockets-KK Series



- Mates directly with 'KK' Series pin headers
- Open ended IDC slots for daisy chain application
- Used with IDT pre-notched ribbon cable or discrete wires

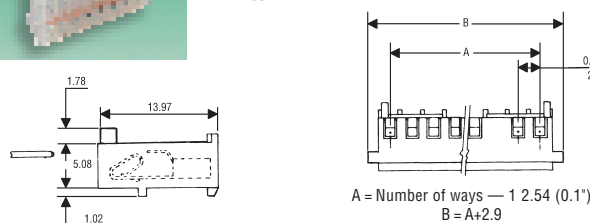

Maximum voltage	300V ac	Housing	White nylon UL94V-2
Current per conductor (dependant upon cable)	2.5A max	Contacts	Brass, tin plated
		Operating temperature	-20°C to 106°C
		Dielectric withstand voltage	1500V ac

7720S — 26 AWG 0.5A (Brown)

Cable sizes	0.124mm ² stranded (26 AWG)	Suitable ribbon cable	7307
	0.086mm ² solid (28 AWG)	Housing colour code	Brown

Mfrs. List No. (38-00-209x) where x = number of ways for 2 to 9 way
(38-00-2xx0) where xx = number of ways for 10 to 17 way

CI2

Order Multiple=5				Price Each		
No. of Ways	Order Code	5+	100+	250+	500+	1000+
2	147-096					
3	147-097					
4	147-098					
5	147-099					
6	147-100					
8	147-101					
9	148-620					
10	147-102					
12	148-621					
13	148-622					
16	148-623					

7720S — 24 AWG 1.4A (Green)

Cable sizes	0.22mm ² stranded (24 AWG)	Suitable ribbon cable	7234
	0.124mm ² solid (26 AWG)	Suitable discrete wire	7/0.2
		Housing colour code	Green

Mfrs. List No. (22-50-3xx5) where xx = number of ways

Order Multiple=5				Price Each		
No. of Ways	Order Code	5+	100+	250+	500+	1000+
2	147-103					
3	147-104					
4	147-105					
5	147-106					
6	147-107					
8	147-108					
10	147-109					
12	148-626					
13	148-627					
16	148-628					
17	148-629					