

Rectangular Multipole — Continued

Tooling for Disk Drive Power Connectors




Mftrs. List No. 455822-2 = 148-089, 465644-1 = 148-090

CM212

	Mftrs. List No.	Order Code	Price Each
Extraction tool (6 way)	4558222	148-089	
Extraction tool (4 way)	4656441	148-090.	

'Fastin-Faston'

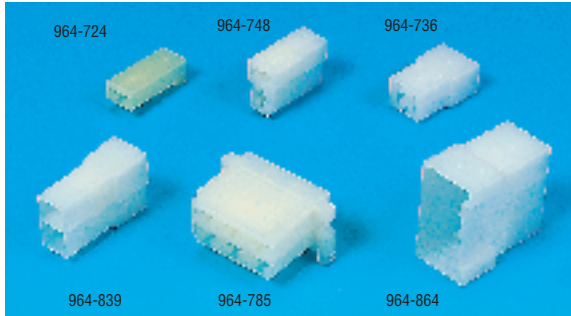

- Multi-position, wire harness coupling connector
- Locking lance on contacts for firm retention in housing
- 1 through to 11 way

Housing Polyamide 6.6 **UL94V-2**
 Contacts Brass, tin plated
 Temperature 105°C

CM416

Order Multiple=5		Price Each			
No of Ways	Mftrs List No.	Order Code	5+	10+	100+ 250+
Receptacle Housing					
1	925324-2	964-724			
2	180923-0	964-736			
2	180907-0	964-748			
3	180941-0	964-750			
4	180900-0	964-761			
6	925276-0	964-773			
6	180904-0	964-785			
8	163007-0	964-797			
11	151325-1	964-803			
Tab Housing					
1	180916-0	964-815			
2	180924-0	964-827			
2	180908-0	964-839			
3	180940-0	964-840			
4	180901-0	964-852			
6	180906-0	964-864			
8	163008-0	964-876			
11	151326-0	964-888			

Crimp Terminals for 'Fastin-Faston'




	Wire Size (mm ²)	Insulation Diameter	Mftrs List No.	Order Code
Receptacles	0.3-0.8	2.2-3.2	60838-1	964-890
Receptacles	0.8-2.1	3.1-4.1	42238-2	964-906
Receptacles	0.8-2.1	3.1-4.1	42282-2	964-918
Tabs	0.3-0.8	2.2-3.1	61316-1	964-920
Tabs	0.8-2.1	3.1-4.1	42241-2	964-931
Tabs	0.8-2.1	3.1-4.1	42565-2	964-943
Contacts	Brass, tin plated			

CM415

	Order Code	Price Per Pack			
		1+	5+	10+	25+ 50+
Receptacle	964-890				
Receptacle	964-906				
Receptacle	964-918				
Tab	964-920				
Tab	964-931				
Tab	964-943				

Tooling for 'Fastin-Faston'

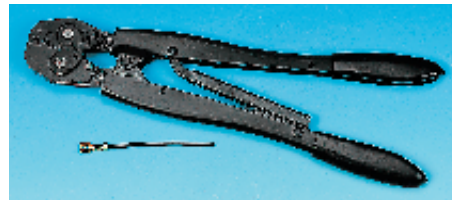

- Ratchet Crimp Tool

CM414

Mftrs List No.	Order Code	Price Each
674655	964-955	1+

Positive Lock '250 Series'




- Suitable for environments with strong vibration and mechanical strain
- Easy mating contact, good mechanical lock
- Receptacle has internal ramp design, engages with contact latch
- Housing available in three colours, natural, black and red

Housing Polyamide 6.6 **UL94V-2**
 Contacts Brass, tin plated
 Temperature 140°C

CM449

Housing 'For use with premier range receptacles'




- Note: 1) 341300-9 for use with 341411 & 341412 only
 2) 172076-1 for use 170335-1 only
 3) 926522-1 mates with Fastin-Faston housing 180908
 4) 926330-1 mates with Fastin-Faston housing 180906
 5) 926646-1 mates with Fastin-Faston housing 163008

CM450

Order Multiple=10		Price Each				
No. of Ways	Colour	Mftrs. List No.	Order Code	10+	50+	100+ 500+ 1000+
Housing - For Premier Range Receptacles						
1	Black	154719-0	148-076			
1	Natural	154719-1	148-106			
1	Red	154719-2	148-167			
2	Black	926522-1	148-192			
Order Multiple=5						
6	Black	926330-1	148-209	5+	50+	100+ 500+ 1000+
8	Black	926646-1	148-210			
Housing - For Standard Range Receptacles						
Order Multiple=10						
1	Black	341300-9	148-222	10+	50+	100+ 500+ 1000+
1	Black	172076-1	148-234			

Receptacles (Crimp Terminals)



Contact Typr	Range	Wire Size (mm ²)	Insulation Diameter (mm)	Mftrs. List No.	Order Code
Receptacle	Premier	0.2-0.7	2.4-3.2	341002-1	148-313
Receptacle	Premier	0.2-0.7	2.4-3.2	341002-6	148-337
Receptacle	Premier	2.5-4.0	3.6-4.3	341001-1	148-349
Receptacle	Premier	2.5-4.0	3.6-4.3	341001-6	148-350
Receptacle	Standard	0.5-1.5	2.1-2.9	341412-1	148-362
Receptacle	Standard	0.5-1.5	2.1-2.9	341412-2	148-374
Receptacle	Standard	1.0-2.5	2.6-3.6	341411-1	148-398
Receptacle	Standard	1.0-2.5	2.6-3.6	341411-2	148-404
Receptacle	Standard	1.8-5.4	3.0-5.1	170335-1	148-416

CM451