


Rectangular Multipole — Continued

Powerpole 'Pak' Housings ANDERSON POWER PRODUCTS

New

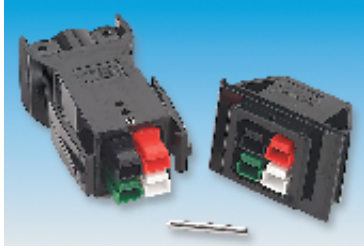

- Rectangular housings for mounting Powerpole connectors up to 45A
- High impact black thermoplastic
- 4, 6 and 8 way models
- Allows easy connection and disconnection of equipment
- Locking pins secure connectors in housings
- Supplied without Powerpole connectors

CM601

No. of Ways	Mfrs. List No.	Order Code	Price Each			
			1+	50+	100+	250+
Cable Mount Plug With Latch						
4	1460G1	351-0189				
6	1460G2	351-0190				
8	1460G3	351-0207				
Panel Mount Receptacle						
4	1470G1	351-0219				
6	1470G2	351-0220				
8	1470G3	351-0232				
Order Multiple=10			10+	50+	100+	250+
Locking Pin			110G9	351-0268		

Housings and Contacts 75 and 120 Amps ANDERSON POWER PRODUCTS

New




- Contact pre-loaded into housing

CM515

Colour	Mfrs. List No.	Order Code	Price Each			
			1+	50+	100+	250+
75 Amps						
Black	1300G4	345-3674				
Red	1300G3	345-3686				
Blue	1300	345-3698				
120 Amps						
Black	1320G1	345-3704				
Red	1320G3	345-3716				
Blue	1320	345-3728				
Crimp Tools			1+			
PP75			345-3741			

Two Pole Power Connectors 50A, 160A and 320A ANDERSON POWER PRODUCTS

New

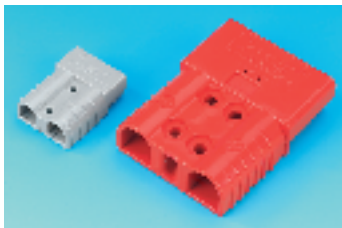

- Twin contact housing with mechanical polarisation, ensures only like colours are mateable
- Colour coded voltage ratings (SBE)
- Contacts can be crimped or soldered
- Auxiliary kit to complement the SBE range for secondary circuits
- Approvals, **UL** and **CSA**

Voltage rating	600V ac/dc	Wire size mm ² (AWG)	SB50	1.5 (16) to 6 (13.3)
Temperature range	-20°C to +105°C		SBE160	35 to 50 (1/0)
Housing material	Polycarbonate UL94V-0		SBE320	70 (2/0) to 95 (4/0)

CM514

Colour	Mfrs. List No.	Order Code	Price Each			
			1+	50+	100+	250+
SB50 (50 Amps)						
Red	6319	345-3753				
Grey	6331G1	345-3765				
SBE160 (160 Amps)						
Red 24V	E6379G2	345-3777				
Grey 36V	E6374G2	345-3789				
Blue 48V	E6375G2	345-3790				
SBE320 (320 Amps)						
Red 24V	E6345G1	345-3807				
Grey 36V	E6347G1	345-3819				
Blue 48V	E6346G1	345-3820				
Auxiliary Kit			6344	345-3832		
Crimp Tools					1+	
SB50			1352G1	345-3741		

Two Pole Power Connectors 'A' Frame Handles ANDERSON POWER PRODUCTS



- Polycarbonate 'A' frame handle relieves strain on cables when disconnecting
- For use with SBE 160 and SBE 320 connectors
- Supplied with necessary screws, nuts and lock washers

New

CM600

Mfrs. List No.	Description	Order Code	Price Each			
			1+	50+	100+	250+
995G1	SBE 160 Handle Grey	351-0270				
995G3	SBE160 Handle Red	351-0281				
995G2	SBE 320 Handle Grey	351-0293				
995G4	SBE 320 Handle Red	351-0300				

'Qikmate' Crimp 2 to 36 Way 13A



Hood for free plug

Free plug

Chassis socket

Contact configurations




2




3b

Price Reduced


4




6




9



12



24 way = 4 6
36 way = 4 9



Panel Cut-out
Panel thickness = 0.8—2.3

	Hood Max Cable dia	
	A	B
2 way	11.4	11.6
3 way	16.5	11.6
4 way	21.7	11.6
6 way	16.5	16.7
9 way	16.5	21.6
12 way	16.7	26.7
24 way	21.7	36.9
36 way	47.2	26.7

Rectangular plastic shells offering a range from 2 to 36 way, available in chassis or free housings. The pin housings can be fitted with a hood for added safety. Strain relief is provided via a cable tie (not supplied – see 149-332/3 Page 154).

Housing Black polyamide 6,6 Temperature range -55°C to +105°C

ORDER CONTACTS SEPARATELY, SEE PAGE 292

CM113