


Supplied as a Plug and Socket Pair		Price Each					
Order Code		1+	10+	50+	100+	500+	1000+
2 pin orange	313-518						
3 pin white	313-520						
3 pin black	313-531						

Conbloc

4 Way Distribution Board with Conplugs 13A



- Compact solution for connecting four appliances with individual plugs into one compact socket block
- 'Mains on' orange neon, fully shuttered sockets, cable strain relief
- Polarised to prevent L/N reversal
- Available with four unfused or fused plugs
- ASTA approved



Excluding plugs: H = 45, W = 150, D = 21.5
Including plugs: H = 75.5 unfused, H = 81 fused.

Current rating		Housing	White impact resistant polycarbonate
Individual plug unfused	6A @ 250V ac	Contacts	Nickel plated brass
Individual plug fused	3.15A (20 5mm)	Plug pins	Phosphor bronze
Total current rating	13A @ 250V ac	Sockets	BS4265


Mftrs. List No. 14009 = 146-491, 14007 = 147-374, 14021 = 147-895, 14023 = 147-896

CM15

	Order Code	1+	4+	20+	100+
Conblock with unfused plugs	146-491				
Conblock with fused plugs	147-895				
Replacement plug (fused)	147-896				

Mains Test Connectors

'Quicktest'

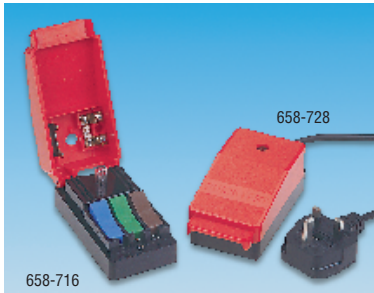

H = 49,
W = 60,
D = 127,
Fixing = 2 M4

- Provides safe and quick method of temporarily connecting mains powered equipment to a suitable power source
- Colour coded terminals
- Neon lamp indicates 'supply on'
- Lid latches open for ease of use when wall mounted
- Available unwired or prewired with 1.5m lead and 13A plug

Contact rating	13A 240V ac max. (15A fuse supplied)
Cable	0.75mm ² , rated 5A, black
Plug fuse	5A supplied

Mftrs. List No. CL1850 = 658-716, CL1855 = 658-728

FOR SUITABLE INTERNATIONAL MAINS LEADS, SEE ORDER CODE 285-663, **PAGE 402**


CM69

	Order Code	1+	10+	25+	100+
Quicktest	.658-716				
Quicktest with 1.5m lead	.658-728				

Major International Brands

All the leading brand names from over 1,000 major international manufacturers.

'Safebloc'

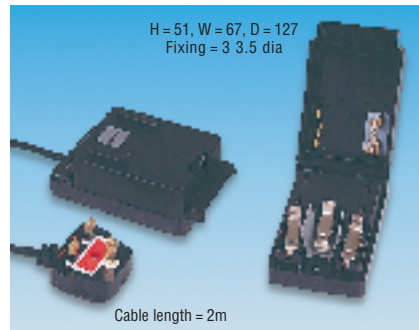

H = 51, W = 67, D = 127
Fixing = 3 3.5 dia

Cable length = 2m

- Quick and secure method of temporarily connecting 2 or 3 core cable to the mains

Safe: With the lid closed all internal live contacts are completely inaccessible

Quick: With the lid raised the colour code clips marked L, N and E are used to clamp the cable in position. Closing the lid completes the supply. Available unwired for bench mounting or prewired with 2 metre trailing lead fitted with moulded 13A plug.

Contact rating	Up to 13A (5A fuse supplied)	Housing	Black thermosetting plastic
Temperature range	0-60°C	Contacts	Nickel plated mild steel
Plug contacts	Brass	Cable	3 core PVC, 0.75mm ² 6A
		Plug fuse	5A supplied

Mftrs. List No. R90000000 = 101-725, R90008000 = 428-954

CM10

	Order Code	1+	10+	25+	100+
Safebloc	101-725				
Safebloc & 2m lead	428-954				

Mains Trailing Sockets

13A



Single, rubber H = 28, W = 57, D = 78
Twin rubber H = 28, W = 125, D = 80
Quad, polycarbonate H = 29, W = 130, D = 105


Contact rating	13A @ 250V ac	Manufactured to	BS1363A
Max. load	3120W		

FOR SUITABLE MAINS FLEX SEE (1.25mm²) 3 CORE, SEE **PAGE 116**

CM16

Colour	Mftrs. List No.	Order Code	1+	10+	25+	100+
Single						
Black	FC133B	.313-543				
White	FC133W	.313-555				
Orange	FC133O	.313-567				
Twin						
Black	FCT133B	.313-579				
White	FCT133W	.313-580				
Orange	FCT133O	150-709				
Quad						
White	FC4133	107-608				

15A Round Pin



Contact rating 15A @ 250V ac
Max. load 3600W
Wire size (min.) 1.5mm²
Manufactured to **BS5733**

Housing Contacts Box qty. Black rubber Brass 10

H = 33, W = 82, D = 113

Mftrs. List No. FC153BLK

FOR SUITABLE 15A PLUG, ORDER CODE 269-130, SEE **PAGE 382**

FOR SUITABLE RUBBER CABLE, SEE **PAGE 117**

CM255

Order Code	1+	10+	50+	100+
.269-141				