

| Order Multiple=10 Wire Size | Order Code | Price Each | | | | |
|---|------------|------------|-----|------|------|------------|
| | | 10+ | 50+ | 100+ | 250+ | 500+ 1000+ |
| Crimp Pins | | | | | | |
| 28-24 AWG, 0.08-0.2mm ² (Sel. Gold) | 593-205. | | | | | |
| 28-24 AWG, 0.08-0.2mm ² (Gold Flash) | 177-6435 | | | | | |
| 24-20 AWG, 0.2-0.52mm ² (Sel. Gold) | 593-217. | | | | | |
| 24-20 AWG, 0.2-0.52mm ² (Gold Flash) | 593-242. | | | | | |
| Crimp Sockets | | | | | | |
| 28-24 AWG, 0.08-0.2mm ² (Sel. Gold) | 593-229 | | | | | |
| 28-24 AWG, 0.08-0.2mm ² (Gold Flash) | 177-6447 | | | | | |
| 24-20 AWG, 0.2-0.52mm ² (Sel. Gold) | 593-230. | | | | | |
| 24-20 AWG, 0.2-0.52mm ² (Gold Flash) | 593-254. | | | | | |

| No. of Ways | Order Code | Price Each | | | | |
|-------------------------------------|------------|------------|-----|------|------|------|
| | | 1+ | 50+ | 100+ | 250+ | 500+ |
| Plug Housings | | | | | | |
| 9 | .151-241 | | | | | |
| 15 | .151-242 | | | | | |
| 25 | .151-243 | | | | | |
| 37 | .151-244 | | | | | |
| Socket Housings | | | | | | |
| 9 | .151-245 | | | | | |
| 15 | .151-246 | | | | | |
| 25 | .151-247 | | | | | |
| 37 | .151-248 | | | | | |
| Crimp Contacts (50 Per Pack) | | | | | | |
| 24/28 AWG pin | .151-236. | | | | | |
| 20/24 AWG pin | .151-237. | | | | | |
| 24/28 AWG socket | .151-238. | | | | | |
| 20/24 AWG socket | .151-239. | | | | | |

Tooling for HDP-20 Crimp 'D'




Mftrs. List No: 58448-2 = 134-5497, 91067-2 = 593-266, 91285-1 = 180-9570

CS478

| Pro-Crimper Insertion/Extraction Tool (24-20 AWG) | Order Code | Price Each | | |
|---|------------|------------|----|-----|
| | | 1+ | 5+ | 10+ |
| Insertion/Extraction Tool (26-24 AWG) | 134-5497 | | | |
| | 593-266. | | | |
| | 180-9570 | | | |

Crimp 'D', Tin and Dimple (Formed Pin)

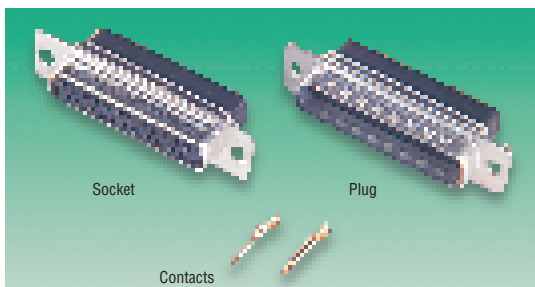

- A range of crimp connectors with rear insert contacts
- The connectors have tinned shells, plugs dimpled for improved electrical continuity.
- The connector and contacts are ordered separately
- Suitable for applications where partial loading is required.


| | | | |
|--------------------|-----------------|-----------|---|
| Contact rating | 4A @ 70°C | Housing | Steel, tin plating |
| Contact resistance | 10mΩ max | Insulator | Black two piece thermoplastic, UL94V-0 |
| Temperature range | -55°C to +85°C | Contacts | Formed copper alloy, gold plating |
| Working voltage | 500V dc/ac peak | | |
| Mating cycles | 100 | | |

Suitable wire sizes:
24/28 AWG, 0.08—0.22mm², 7/0.2 or 10/0.1
20/24 AWG, 0.20—0.52mm², 7/0.2 or 16/0.2

| | | | |
|-----------------|--|---|--|
| Mftrs. List No. | DEC9PTD = 151-241, DCC37PTD = 151-244, DBC25ST = 151-247, MP649-06 = 151-237, | DAC15PTD = 151-242, DEC9ST = 151-245, DCC37ST = 151-248, MP648-16 = 151-238, | DBC25PTD = 151-243, DAC15ST = 151-246, MP647-06 = 151-236, MP650-16 = 151-239 |
|-----------------|--|---|--|

CS74

Crimp 'D' Tin and Dimple (Formed Pin)

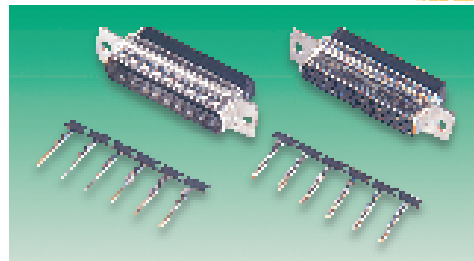

- A range of Tin and Dimple D connectors with rear insert snap in contacts
- The connector housing is supplied without contacts (contacts ordered separately)
- The connectors are suitable for applications requiring less than the full population of pins or sockets

| | | | |
|--------------------|-----------------|-----------|--|
| Contact rating | 4A @ 70°C | Housing | Steel, tin plating |
| Contact resistance | 10mΩ max | Insulator | Black, two piece thermoplastic, UL94V-0 |
| Working voltage | 125V ac | Contacts | Formed copper alloy, gold plating |
| Temperature range | -55°C to +125°C | | |
| Mating cycles | 50 | | |


| | | | | | |
|---------------|-----------------|------------|-----------------|-----------------|------------|
| Plug Housings | Mftrs. List No. | Order Code | Socket Housings | Mftrs. List No. | Order Code |
| 9 way | 0967-009-5601 | 150-161 | 9 way | 0967-009-4701 | 150-165 |
| 15 way | 0967-015-5601 | 150-162 | 15 way | 0967-015-4701 | 150-166 |
| 25 way | 0967-025-5601 | 150-163 | 25 way | 0967-025-4701 | 150-167 |
| | | | 37 way | 0967-037-4701 | 150-168 |

Open Crimps
Pin contact 0.25-0.56mm² (24-20 AWG) – strip of 10 0967-000-8167 225-010
Socket contact 0.25-0.56mm² (24-20 AWG) – strip of 10 0967-000-8267 225-022

CS76

| No. of Ways | Order Code | Price Each | | | | |
|--------------------------------------|------------|------------|-----|-----|------|-----------|
| | | 1+ | 10+ | 50+ | 100+ | 250+ 500+ |
| Plug Housings | | | | | | |
| 9 | 150-161 | | | | | |
| 15 | 150-162 | | | | | |
| 25 | 150-163 | | | | | |
| Socket Housings | | | | | | |
| 9 | 150-165 | | | | | |
| 15 | 150-166 | | | | | |
| 25 | 150-167 | | | | | |
| 37 | 150-168 | | | | | |
| Crimp Contacts (10 Per Strip) | | | | | | |
| Pin | 225-010 | | | | | |
| Socket | 225-022 | | | | | |

Tooling for Crimp 'D'

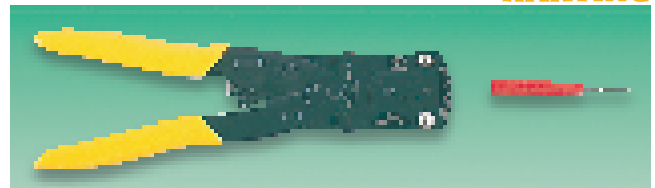

Mftrs. List No. 0999-000-0175 = 150-171, 0999-000-0171 = 150-172

CS77

| Crimp tool | Order Code | Price Each |
|------------|------------|------------|
| | | |

continued