

## Panel Mounting Terminals — continued

### 2BA Non Insulated Binding Post



L = 38.1, Dia = 12,  
Maximum panel thickness = 12.5,  
Panel cut-out = 4.6 dia

Mftrs. List No. 351-0000

CS194

Order Code	1+	50+	100+	250+	500+
.147-002					

### 2mm Panel Plug



- Multi purpose gold plated 2mm plug
- Used in conjunction with PCBs for instrumentation
- M2 thread

L = 23, Cut-out = M2

Contact rating 25A  
Contact resistance  $\leq 0.4m\Omega$   
Contact Temperature (max.) Copper alloy, gold plated 150°C

CS458

Order Multiple=5	Order Code	1+	50+	100+	250+	500+
Mftrs. List No. 22.1100	972-460					

### 4mm Panel plugs 16A



- Fully mating connectors as built in
- VST20 for solder pin connection upto 2mm<sup>2</sup>, VST100 for screw connection upto 2.5mm<sup>2</sup>

Material Brass, nickel plated  
Rated Voltage 60VDC  
Rated Current 16A  
Contact resistance 3mΩ  
Temperature range -25°C to +100°C

Mftrs. List No. 930050-000 (VST20), 930581-000 (VST100)


CS553

5 Per Pack	Order Code	1+	10+	25+	50+	100+
VST20	497-850					
VST100	810-721					

### 4mm Panel Plug



L = 29.5, Cut-out = M4

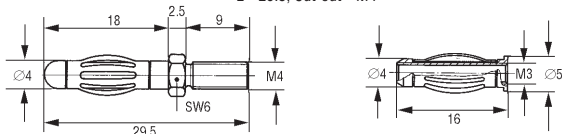

- Multi purpose gold plated 4mm plug
- Used in conjunction with PCB's, for instrumentation and power units
- Available with M4 threaded stud or M3 internal thread

CS353

Order Multiple=5	Mftrs. List No.	Order Code	5+	50+	100+	250+	500+
Threaded stud (M4)	22.1053	749-850					
Internal thread (M3)	22.1054	749-862					

### 4mm 'O-Z' Panel Plug 10A



L = 34.2, 4BA fixing

CS195

Mftrs. List No.	Order Code	1+	100+	250+	500+
L514	317-299				


## Terminals and Fixing Kits

Terminals, panel fitting and fixing kits are supplied unassembled and must be ordered as individual items e.g. specify terminal Order Code and colour, type of panel fitting and type of fixing kit.

### 10A



Overall length = 31.7, Overall dia = 8.0  
Stem length = 20.6, Stem thread = 6BA



A miniature terminal with a 2mm socket in the head. The clamping gap is free from threads and has a 2.1mm dia crosshole for wire insertion. Available in red or black. Type 317-349 panel fitting including fixing kit available.


CS196

Mftrs. List No.	Order Code	1+	200+	500+	1000+
Terminal (Red) L1726/1/RED	317-305				
Terminal (Black) L1726/1/BLACK	317-317				
Panel fitting kit REF-04	317-329				

### 10A



Overall length = 46.0, Overall dia = 17.5  
Stem length = 25.63, Stem thread = 2BA



DEF-5335 approved for services use and panel sealed. The terminal has a 4mm socket in the head and a large clamping gap (4mm) with unique pyramid shaped teeth for piercing the wire insulation, obviating the need for wire stripping. Available in black only. Type 317-342 panel fitting including fixing kit available.

CS197


Mftrs. List No.	Order Code	1+	50+	200+	500+
Terminal L1361/1/BLACK	317-330				
Panel fitting kit REF-02	317-342				

### 15A



Overall length = 47.7, Overall dia = 15.1  
Stem length = 31.8, Stem thread = 8-32UNC

This terminal has an easy grip captive head containing a 4mm socket. The clamping gap is free from threads and has a 2.1mm cross hole for wire insertion. Available in red or black. Suitable panel fittings: 317-378, 317-380, 317-391 and fixing kit 317-408.

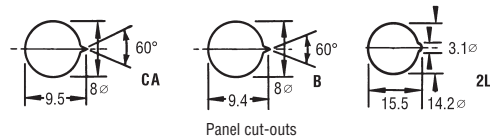

CS198

Mftrs. List No.	Order Code	1+	100+	250+	500+
Terminal (Red) L1499 /1/RED	317-354				
Terminal (Black) L1499/1/BLACK	317-366				
Order Multiple=5		5+	50+	200+	500+
Panel fitting kit REF-CA	317-378				
Panel fitting kit REF-B	317-380				
Fixing kit KIT-2	317-408				
Order Multiple=1		1+	50+	200+	500+
Panel Fitting Kit REF-2L	317-391				