


15A



Belling Lee


This terminal incorporates a non rotating centre disc in the head for lettering. The rotating collar is captive and the clamping gap is free from threads. Collar colour: black, Disc colour: red or black. Suitable panel fitting 317-378, 317-380, 317-391 and fixing kit 427-329.

Overall length = 48.0, Overall dia = 16.7
Stem length = 30.1, Stem thread = 2BA

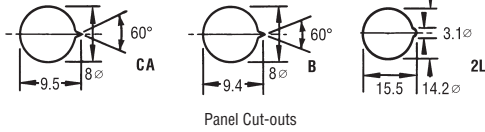

Order Multiple=1	Mfrs. List No.	Order Code	1+	50+	200+	500+
Terminal (Red)	L10011RED	317-410				
Terminal (Black)	L10011BLACK	317-421				
Panel fitting kit	REF-2L	317-391				
Order Multiple=5			5+	50+	200+	500+
Panel fitting kit	REF-CA	317-378				
Panel fitting kit	REF-B	317-380				
Fixing kit	KIT-3	427-329				

30A



Overall length = 63, Overall dia = 25
Panel thickness = 1.6 to 23.8, Stem thread = OBA

An insulated terminal with non-rotating red or black centre disc suitable for lettering. The terminal has a black easy grip collar and is supplied with a panel fitting kit.

Contact rating	30A	Housing	Phenolic resin
Breakdown voltage	3000V dc min	Stud	Brass, nickel plated
Temperature range	-25°C to +85°C	Termination	Screw

Mfrs. List No. L309/1/F/RED/FN = 225-654, L309/1/F/BLACK/FN = 225-666

	Order Code	1+	25+	50+	100+
Red	.225-654				
Black	.225-666				

Crocodile Clips

Miniature Insulated

multicomp



Clip L = 30
Overall L = 40

● General purpose miniature insulated crocodile clips

Material	Steel, Nickel plated	Insulation	PVC
Current rating	1A max	Connection type	Solder

Order Multiple = 5	Order Code	5+	25+	50+	100+	250+
Red	324-1622					
Black	329-4882					

Miniature 6A



Miniature crocodile clip for use with very small components. Crimp or solder termination. Maximum wire size 0.5mm².

Overall length = 17, Clamping limit = 1


Current rating	6A	Temperature range	-25°C to +100°C
Maximum working voltage	25V ac, 60V dc	Material	Brass, silver plated
Contact resistance	15mΩ	Termination	Solder or crimp

Mfrs. List No. AGF1

5 Per Pack

Order Code	1+	10+	25+	50+	100+
495-177					

Insulated 2mm

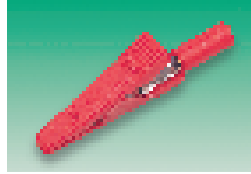

Miniature crocodile clips with very fine serrated jaws. The flat part of the clamping jaw ensures that even extremely thin wires are clamped securely. For use with 2mm plugs. Nickel plated brass jaws and unbreakable plastic insulation.



Overall length = 41.5, Clamping limit = 3

Current rating	5A	Housing	Polypropylene
Temperature range	-25°C to +100°C	Contacts	Brass, nickel plated

Mfrs. List No. MA1REDBLACK

1 Pair Per Pack

Order Code	1+	10+	25+	50+	100+
Red and Black	496-145				

Insulated 2mm



Miniature crocodile clips with very fine serrated jaws. Cables can either be plugged into the 2mm socket or solder and crimp terminated.


Overall length = 41,
Clamping limit = 3

Current rating	5A	Housing	Hostalen
Voltage rating	30Vac/60Vdc	Contacts	Brass, tin plated
Temperature range	-25°C to +85°C		

Mfrs. List No. 24.0154-1 = 152-427, 24.0154-4 = 152-428

	Order Code	1+	10+	50+	100+	250+
Red	.152-427					
Black	.152-428					

Insulated 2 or 4mm

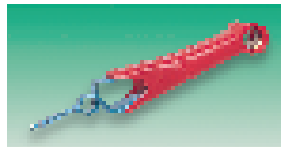

Crocodile clip for clamping very small components in areas of high component density. Contact tongues insulated on outside to prevent short circuit. For use with 2 and 4mm plugs.

Overall length = 55, Clamping limit = 4

Volume resistance	300mΩ	Housing	Vestolit
Temperature range	-25°C to +80°C	Contacts	Stainless steel

Mfrs. List No. AGF2+Colour

	Order Code	1+	10+	25+	50+	100+
Red	495-189					
Black	495-190					

4mm 5A



- Nickel-plated stainless steel crocodile clip
- Maximum bolt diameter 10mm
- 4mm socket

Rated voltage	60VDC
Contact resistance	15mΩ
Temperature range	-25°C to +100°C

Mfrs. List No. 930122-000

5 Per Pack	Order Code	1+	10+	25+	50+	100+
AGF30	810-472					

continued