


Crocodile Clips — continued

4mm 5A



Best value

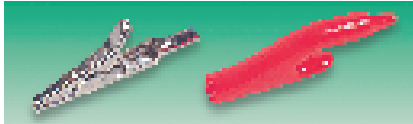

Overall length = 51, Clamping limit = 15mm at point of jaws

Crocodile clip in nickel plated steel that will accept a 4mm plug. (A turned brass screw allows wires to be held securely). PVC insulating covers in red and black are available separately.

Mftrs. List No. 303-0000 = 147-003, 302-0500 = 147-005, 302-0100 = 147-018

CS201

Order Multiple=10	Order Code	10+	50+	100+	250+	500+
Crocodile clip	147-003					
Red insulating cover	147-005					
Black insulating cover	147-018					

4mm 5A



Overall length = 42

Crocodile clips in bright zinc passivated steel. Available with or without coloured rubber insulating sleeves.

Mftrs. List No. CR0005 = 317-469, CR0007RED = 317-470, CR0008BLACK = 317-482

CS202

Order Multiple=2	Order Code	2+	100+	250+	500+	1000+
Crocodile clip	317-469					
Crocodile clip with sleeves	317-470					
Crocodile clip with sleeves	317-482					

Insulated 4mm 10A



A 10 Amp insulated crocodile clip that will accept 4mm plug or thin stranded wire which may be retained by using an integral screw.


Clamping limit = 15mm at point of jaws

Mftrs. List No. 307-0500 = 147-004, 307-0100 = 147-017

CS204

	Order Code	1+	20+	50+	100+
Red	147-004				
Black	147-017				

Insulated 4mm 15A



Touch-proof insulated clips for use with 4mm standard or shrouded plugs. Complies with IEC1010-2/3.

Overall length = 53.5, Clamping limit = 11

Current rating	15A <th>Housing</th> <td>Polyamide</td>	Housing	Polyamide
Working voltage	300V CATII	Contacts	Brass, nickel plated
Temperature range	-25°C to +80°C		

Mftrs. List No. 24.0157-1 = 225-083, 24.0157-4 = 225-095

CS215

5 Per Pack	Order Code	1+	10+	20+	50+
Red	225-083				
Black	225-095				

Shrouded 4mm 15A



Touch proof insulated clips for use with 4mm standard or shrouded plugs. With a flat clamping area for very fine wires. BG approved. Supplied in pairs of red and black.

Overall length = 81
Clamping limit = 9.5



Current rating	15A	Housing	Polypropylene, UL94HB
Working voltage	1000V	Contacts	Brass, nickel plated
Temperature range	-25°C to +80°C		

Mftrs. List No. AK2B+Colour

CS264

1 Pair Per Pack	Order Code	1+	10+	25+	50+	100+
Red and Black	.462-822					

Insulated 4mm 20A



Accepts 4mm standard plugs or can be screw terminated. Unbreakable insulation on all sides, conforming to DIN 57 470 Pt 1. Clamps fine wires and pins up to 9.5mm.

Best value



Overall length = 80.5, Clamping limit = 9.5


Current rating	20A	Temperature range	-25°C to +100°C
Operating voltage	50V	Housing	Polypropylene
Contact resistance	10mΩ	Contacts	Brass, tin plated
Clamping force at tip (max.)	10N		

Mftrs. List No. AK2SREDBLACK

CS310

1 Pair Per Pack	Order Code	1+	10+	25+	50+	100+
Red and Black	495-311					

Shrouded 4mm 32A 'Dolphin'



Touch proof insulated clips for use with 4mm standard or shrouded plugs. With a large clamping limit, easy grip body and flat clamp area for fine wires. Complies to IEC1010-2-031. Supplied in pairs of red and black.

Clamping limit = 30

Current rating	32A	Housing	Polyamid, UL94V-2
Rated voltage	1000V CAT III	Contacts	Brass, nickel plated
Temperature range	-40°C to 80°C		

Mftrs. List No. 66.9575-22 = red, 66.9575-21 = black

CS263

1 Pair Per Pack	Order Code	1+	10+	25+	50+	100+
Red and Black	338-3507					

Battery Clip 20A



Overall length = 75.5

Exceptionally good grip makes the clip ideally suited for use as a battery or terminal clip. Cables can be screw and crimp terminated onto the bright nickel plated steel clip. PVC insulating covers in red and black are available separately.

Best value

Clamping limit = 30mm at point of jaws

Mftrs. List No. 304-0000 = 152-326, 310-0500 = 152-327, 310-0100 = 152-328

CS205

	Order Code	1+	10+	50+	100+	250+
Crocodile clip	.152-326					
Red insulating cover	.152-327					
Black insulating cover	.152-328					

Battery Clip



Current rating	25A
Material	Steel, hot tin dipped

Mftrs. List No. CR0028 = 317-494

Overall length = 58.7,
Clamping limit = 14.5 at point of jaws

CS206

	Order Code	1+	100+	250+	500+	1000+
	317-494					