


Foot and Palm Switches — continued

Palm/Footswitch 3A @ 240V ac

herga



H = 27, W = 66, L = 116.5

- Can be hand or foot operated
- Hinge is located at the front for improved operator comfort
- Switch is moulded in glass filled nylon for strength and rigidity
- Supplied with 2 metres of 3 core cable
- 733-829 sealed to **IP40**, 733-830 sealed to **IP65**


Contact rating SPCO, 3A @ 240V ac

Mfrs. List No. 6220-IP40 = 733-829, 6220-IP65 = 733-830
SW329

	Order Code	Price Each			
		1+	10+	25+	50+
Palm/Footswitch, IP40	.733-829				
Palm/Footswitch, IP65	733-830				

Treadle Footswitch 3/6A @ 240V ac

herga

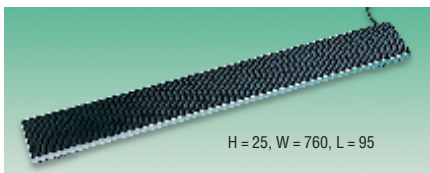

H = 25, W = 760, L = 95

- Non-slip base and foot pad
- Provided with 2 metres of cable
- Incorporates two momentary SPST foot switches wired in parallel


Current rating 6A resistive, 3A inductive @ 240V ac

SW325

Mfrs. List No.	Order Code	Price Each				
		1+	10+	25+	50+	100+
6289-01	.733-817					

Industrial, Medium Duty 3/6A @ 240V ac

herga



H = 46, W = 95, D = 150


- Die-cast aluminium base and cover
- SPDT momentary contacts
- Non-slip base and foot pad

Current rating 6A resistive, 3A inductive @ 240Vac
SW328

Mfrs. List No.	Order Code	Price Each				
		1+	10+	25+	50+	100+
6254-CT	.733-805					

Industrial, Heavy Duty 10A @ 500V ac

BERNSTEIN



Guarded H = 145, W = 154, L = 250,
Unguarded H = 60, W = 70, L = 220

- Momentary action versions feature snap-action SPDT safety switch conforming with **IEC 204-1**
- Momentary action foot switch available with or without the strong diecast aluminium red shroud
- Latching version features standard snap-action contacts
- Cable entry is via M20 threaded hole
- Sealed to **IP65**
- Mounting holes allow permanent fixing to floor or machine

Electrical life 1,000,000 ops Operating temperature -30°C to +80°C

Mfrs. List No. F1-SU1 = 178-891, F1-SU1UN = 176-493, F1-SU1YUN = 178-890

SW115

	Order Code	Price Each			
		1+	5+	10+	20+
Momentary, without shroud	.178-891				
Momentary, with shroud	.176-493				
Latching, with shroud	.178-890				

Heavy Duty Footswitches 10A @ 500Vac

IMO



H = 124, W = 140, D = 240 (shrouded) H = 67, W140, D = 230 (unshrouded)

- Large shroud
- Available with pedal interlock
- Positive break N/C safety contacts
- **IP65** protection
- 10A @ 500Vac/600Vdc rated

Operating Temp: -25°C to +80°C

Contacts: General - 1 N/O & 1 N/C

Safety: -1 N/O & 1 N/C

Mfrs List No: PX10111 = 311-1842, PX10311 = 311-1854, PX10121 = 311-1866, PA20101 = 311-1878, PA20701 = 311-1880

SW189

Contacts	Order Code	Price Each			
		1+	5+	10+	20+
Shrouded Footswitch					
General	311-1842				
Safety	311-1854				
General with interlock	311-1866				
Unshrouded Footswitch					
General	311-1878				
Safety	311-1880				

Foot and Palm Switches

MOELLER



H = 85, W = 85, D = 97, Dome dia. = 93

- For use in emergency stop circuits
- Available in latching or no latching versions- latching has a pull to release mechanical latching action
- Complete with 1NO and 1NC contacts
- Mounting box has 4xPG 13.5 conduit entry knockouts - left, right, bottom and mounting base
- **UL & CSA** approved
- Conforms to **EN418**, tamperproof
- Red and green indicators available

CTL148

Type	Mfrs. List No.	Order Code	1+	5+	10+
Red, Latching Style	FAK-RT/V/KC/11/I	.239-720			
Red, Non Latching Style	FAK-RT/KC/11/I	.722-0297			
Blk, Non Latching Style	FAK-SW/KC/11/I	.722-0303			
Yel., Non Latching Style	FAK-GE/KC/11/I	.722-0315			
Red Indicator, 230V	L-FAK-RT-S	722-0327			
Green Indicator, 230V	L-FAK-GN-S	722-0339			

Control Pendants

Telemecanique



A range of push-button pendant control stations for remote control applications, hoists, overhead cranes etc. The units are manufactured to conform to **IEC 337-1**, **NFC 63-140** and **VDE0660 Pt 2** standards, with yellow double insulated polypropylene (2 way units polyamide) enclosures giving **IP65** protection.

Each push-button has 1 NO + 1 NC slow operate contact blocks, with mechanical interlocking between similar control functions. The push buttons are shrouded, flush mounted, positive action, with fitted legend plates. 4 way and 6 way units are fitted with key release stop buttons.

2 way	4 way	6 way
H (overall) = 276, W = 50, D = 60	H (overall) = 473, W = 80, D = 70	H (overall) = 533, W = 80, D = 70