



## DIN Rail Terminals

Weidmüller

CTL061



32mm asymmetric




35mm symmetric


CTL058

### Feed Through – Asymmetric

Weidmüller

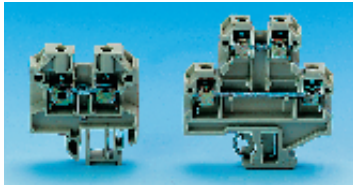

Standard SAK type      Space saver DK4 type



The terminals are designed so that all kinds of conductor, single, solid or fine stranded can be connected without special preparation. Approvals include **CSA, UL, BASEEFA, NEMKO, DEMKO, SEV, CEGB** and **LLOYDS**.

Type	Cable Size (mm <sup>2</sup> )		Current Rating	Height in Rail	Width	Pitch	Colour	Mfrs.	
	Stranded	Solid						List No.	Order Code
SAK2.5*	2.5	4.0	27A	46.5	36.5	6	Buff	952032	488-471
SAK2.5	2.5	4.0	27A	46.5	36.5	6	Buff	027966	105-406
SAK4	4.0	6.0	36A	51.5	40	6.5	Buff	012836	105-407
SAK6N	6.0	10.0	47A	51.5	40	8	Buff	019326	105-408
SAK2.5	4.0	4.0	27A	46.5	36.5	6	Blue	027968	105-420
SAK4	4.0	6.0	36A	51.5	40	6.5	Blue	012838	105-421
DK4	4.0	4.0	27A	57.0	50.0	6	Buff	035546	105-425
DK4Q	4.0	4.0	27A	59.5	54.0	6	Buff	059006	275-244

CTL059

### Order Multiple=10

Type	Current Rating	Order Code	Price Each		
			10+	100+	500+
<b>Standard Buff Housing</b>					
SAK2.5*	27A	<b>488-471</b>			
SAK2.5	27A	<b>.105-406</b>			
SAK4	36A	<b>.105-407</b>			
SAK6N	47A	<b>.105-408</b>			
<b>Standard Blue Housing</b>					
SAK2.5	27A	<b>.105-420</b>			
SAK4	36A	<b>.105-421</b>			
<b>Space Saver Buff Housing</b>					
DK4	27A	<b>105-425</b>			
DK4Q	27A	<b>.275-244</b>			

\*488-471 has centre knockout fitted.

### Isolating, Fused and Earth – Asymmetric

Weidmüller



Isolating SAKR type      Fused SAKS3 type      Earth EK type

The isolating terminal is used where there is a need to remove the supply voltage from a circuit. The buff polyamide 6.6 housing is rated up to 440V. Approvals include **CSA, UL, VDE, SEV** and **CEGB**.

The fused terminal has a vertical fuse holder moulded in a light brown melamine housing. The fuse is accessed from the top of the terminal via a screw cap. Approvals include **CSA, UL** and **VDE**.

The earth terminal is fully enclosed in a yellow/green Polyamide 6.6 housing. Approvals include **CSA, UL, VDE, BASEEFA, NEMKO, DEMKO, SEMKO** and **SEV**.


Fuse size	Cable Size (mm <sup>2</sup> )		Current Rating	Height in Rail	Width	Pitch	Mfrs.	
	Stranded	Solid					List No.	Order Code
<b>Isolating – SAKR Type</b>								
—	4.0	4.0	10A	54.5 (open)	42	6.5	041216	105-426
<b>Fused – SAKS3 Type</b>								
1" ¼"	10.0	10.0	13A, 250V	61.0	54	13.0	021112	105-427
1 ¼" ¼"	10.0	10.0	10A, 440V	61.0	54	13.0	024892	105-428
<b>Earth – EK Type</b>								
—	2.5	4.0	27A	48.5	36.5	6.0	047436	105-423
—	4.0	6.0	36A	51.5	40.0	8.0	035456	105-424

### Order Multiple=5 Rating

Order Code	5+	10+	100+	500+
<b>Isolating – SAKR Type</b>				
10A, 440V				
<b>.105-426</b>				
<b>Fused – SAKS3 Type</b>				
1" ¼", 13A @ 250V				
1 ¼" ¼", 10A @ 440V				
<b>.105-427</b>				
<b>105-428</b>				
<b>Earth – EK Type</b>				
27A				
36A				
<b>.105-423</b>				
<b>.105-424</b>				

### Feed Through – Symmetric

Weidmüller

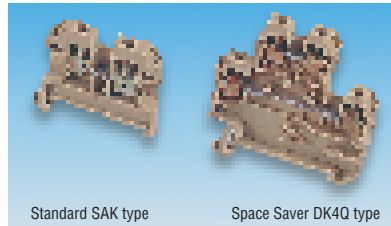

Standard SAK type      Space Saver DK4 type

Approvals include **CSA, UL, BASEEFA, NEMKO, DEMKO, SEV, CEGB** and **LLOYDS**.

Type	Cable Size (mm <sup>2</sup> )		Current Rating (A)	Height in Rail	Width	Pitch	Colour	Mfrs.	
	Stranded	Solid						List No.	Order Code
SAK2.5/35	2.5	4	27	40	45	6	Buff	038046	238-259
SAK4/35	4	6	36	44	45	6.5	Buff	044366	238-260
SAK6/35	6	10	47	44	45	8	Buff	038056	238-272
SAK10/35	10	16	65	44	45	10	Buff	044376	238-284
SAK16/35	16	16	87	50	50	12	Buff	038066	238-296
SAK35N/35	35	50	145	60	58	16	Buff	060826	238-302
SAK2.5/35	2.5	4	27	40	45	6	Blue	038048	238-314
SAK4/35	4	6	36	44	45	6.5	Blue	044368	238-326
DK4Q/35	4	4	27	60.5	54	6	Buff	059016	238-363

CTL141

### Order Multiple=10

Type	Current Rating (A)	Order Code	Price Each			
			10+	50+	100+	500+
<b>Standard Buff Housing</b>						
SAK2.5/35	27	<b>238-259</b>				
SAK4/35	36	<b>238-260</b>				
SAK6/35	47	<b>238-272</b>				
SAK10/35	65	<b>238-284</b>				
SAK16/35	87	<b>238-296</b>				
SAK35N/35	145	<b>238-302</b>				
<b>Standard Blue Housing</b>						
SAK2.5/35	27	<b>238-314</b>				
SAK4/35	36	<b>238-326</b>				
<b>Space Saver Buff Housing</b>						
DK4Q/35	27	<b>238-363</b>				

### Isolating, Fused and Earth – Symmetric

Weidmüller



Isolating SAKR/35      Fused ASK1  
Isolating DKT4/35  
Fused KSK/35      Earth EK2.5 & 4/35      Earth EK16/35

Isolating terminals have a buff polyamide 6.6 housing rated up to 440V. Approvals include **CSA, UL, VDE, SEV** and **CEGB**.

Fused terminals. The ASK1 has a buff polyamide housing rated up to 500V. Approvals include **CSA, UL, VDE**. KSK1&2/35 and KSK3/35 have light brown melamine housing rated up to 250 and 440V respectively.

Earth terminals. EK2.5/3.5 and EK4/35 are fully enclosed in a yellow/green polyamide 6.6 housing. The EK16/35 is a plated steel construction with no housing. Approvals include **CSA, UL, VDE, BASEEFA, NEMKO, DEMKO, SEMKO** and **SEV**.