

Spring Clips

Coated



- Polythene coated carbon spring steel
- Colour – Black





H227

Size	Mnt. Hole		Qty Per Pack	Order Code	Price Per Pack			
	Inches	mm			1+	5+	25+	50+
1/4"	6.4	3/32"	25	708-1492				
3/8"	9.5	3/32"	25	708-1509				
1/2"	12.7	1/8"	25	708-1510				
3/4"	15.9	1/8"	25	708-1522				
1"	19.1	1/8"	10	708-1534				
1 1/4"	25.4	1/8"	10	708-1546				
1 1/2"	28.6	3/16"	10	708-1558				
1 3/4"	31.8	3/16"	10	708-1560				
1 7/8"	38.1	3/16"	10	708-1571				

Hose Fixing

Pipe Clamps

Steel, Zinc Plated with Santoprene Cushion

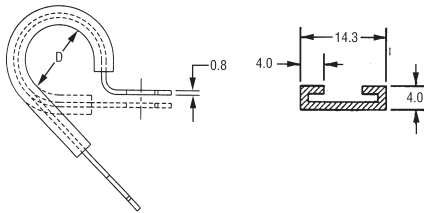

- Secure clamping of pipes and cables
- Santoprene cushion prevents chaffing

H275

25 Per Pack		Order Code	1+	Price Per Pack			
D	E			10+	25+	50+	100+
4.8	12.7	723-5045					
6.4	13.5	723-5057					
9.5	15.0	723-5069					
12.7	16.5	723-5070					
19.1	21.3	723-5082					
25.4	24.4	723-5094					

'O' Clips



- High-grade carbon steel, zinc plated and chrome-passivated



FAS64

Size mm	Qty Per Pack	Order Code	Price Per Pack			
			1+	5+	10+	25+
5-7	25	708-0323				
7-9	25	708-0335				
9-11	25	708-0347				
11-13	25	708-0359				
13-15	15	708-0360				
15-18	15	708-0372				

'O' Clip Kit



- High-grade carbon steel, zinc-plated and chromate-passivate



Top up bags for kits are available.

Kit Contents: 180 Clips Total

Size mm	Quantity	Nominal Range mm	Band Width mm	Band Thickness mm	I/D Width of Ear mm
5-7	25	0.250	6.0	0.7	3.0
7-9	25	0.313	7.0	1.0	3.2
9-11	25	0.438	7.0	1.0	3.5
11-13	25	0.500	7.0	1.0	3.5
13-15	20	0.563	7.5	1.1	4.0
15-18	20	0.625	8.0	1.2	5.0
17-20	15	0.750	8.5	1.2	6.0
20-23	10	0.875	9.0	1.5	6.5
23-27	10	1.000	10.0	1.5	7.0

FAS65

Order Code	Price Per Kit			
	1+	5+	25+	50+
708-0785				

Hose Clip, Nylon 6.6

Quick Installation



- Double row interlocking teeth
- UV and heat stabilised nylon 6.6
- Wide operating temperature once fitted
- High resistance to most chemicals
- Apply using pliers or multi-grips

Operating temperature -40°C to +150°C

H266

Type	Size Min/Max	Order Code	Price Each				
			10+	50+	100+	250+	500+
A	5.6/6.5	723-5290					
AA	6.5/7.9	723-5306					
B	7.9/9.2	723-5318					
BB	9.2/10.3	723-5320					
C	10.2/11.8	723-5331					
CC	11.1/13.4	723-5343					
D	12.0/13.8	723-5355					
E	13.1/15.1	723-5367					
F	15.0/17.1	723-5379					
G	16.9/19.1	723-5380					
H	18.1/20.6	723-5392					
J	20.3/23.0	723-5409					
K	22.2/24.9	723-5410					
L	24.5/27.6	723-5422					
M	26.5/29.5	723-5434					
N	28.8/32.2	723-5446					

Worm Drive



- High quality zinc-plated for durability
- Stainless steel drives are ideal for marine and food handling environments
- 7mm A/F hexagon head screws with screwdriver slot
- Up to twice as strong as BS requirements



FAS2

5 Per Pack	Size No.	mm ∅	inches ∅	Order Code	Price Per Pack				
					1+	5+	10+	25+	50+
Zinc Plated	000	9.5-12	3/8-1/2	501-062					
	M00	11-16	1/2-5/8	501-074					
	00	13-20	1/2-3/4	501-086					
	0	16-22	5/8-7/8	501-098					
	0X	18-25	3/4-1	501-104					
	1A	22-30	7/8-1 1/8	501-116					
	1	25-35	1-1 1/8	501-128					
	1X	30-40	1 1/8-1 1/2	501-130					
	2A	35-50	1 1/4-1 7/8	501-141					
	2	40-55	1 1/2-2 1/8	501-153					
	2X	45-60	1 3/4-2 3/8	701-1570					
	3	55-70	2-2 3/4	701-1581					
	3X	60-80	2 3/8-3 1/8	701-1593					
	4	70-90	2 3/4-3 1/2	701-1600					
	4X	85-100	3 1/4-4	701-1611					
	5	90-120	3 3/4-4 1/2	701-1623					
	6	110-140	4 1/4-5 1/2	701-1635					
	6X	130-150	5-5 3/4	701-1647					
	7	135-165	5 1/4-6 1/2	701-1659					
	750	158-190	6 1/4-7 1/2	701-1660					
	850	184-216	7 1/4-8 1/2	701-1672					

continued