

Beacons — continued

X125/200/300 Series — Xenon



- High visibility flashing xenon beacons for commercial/industrial installations
- X125, 200 and 201 suitable for surface, conduit box (BESA) or anti-vibration plate mounting (Order Code **309-9672**)
- X300 and 301 DIN stud mounting
- X300P and 301P pole or conduit end mounting, M12 mounting thread size
- X200, 201, 300 and 301 optional double flash rate
- Sealed to **IP65**

Stud mounting dimensions = 3 M6 equi-spaced on 130 pcd

Operating temperature		-35°C to +66°C		Supply voltage		±20%	
Supply Voltage	Current	Flash Rate/Min.	Light Source	Light Output (Joules)	Base Dim. H Dia.	Mftrs. List No.	Order Code
Surface Mounting							
115V ac	30mA	60	Xenon Tube	2.3	31 .65	X125-55	309-9209
230V ac	21mA	60	Xenon Tube	2.7	31 .65	X125-56	309-9210
12V dc	310mA	60	Xenon Tube	2.9	31 .65	X125-57	309-9222
24V dc	170mA	60	Xenon Tube	2.9	31 .65	X125-58	309-9234
115V ac	100mA	60/120	Xenon Tube	10/7.5	49 115	X200-21	309-9246
230V ac	60mA	60/120	Xenon Tube	10/7.5	49 115	X200-22	309-9258
12/24V dc	1.45A/700mA	60/120	Xenon Tube	10/7.5	49 115	X201-18	309-9260
DIN Stud Mounting							
115V ac	100mA	60/120	Xenon Tube	10/7.5	94 150	X300-21	309-9271
230V ac	60mA	60/120	Xenon Tube	10/7.5	94 150	X300-22	309-9283
12/24V dc	1.45A/700mA	60/120	Xenon Tube	10/7.5	94 150	X301-18	309-9295
Pole Mounting							
115V ac	100mA	60/120	Xenon Tube	10/7.5	94 150	X300P-21	329-7317
230V ac	60mA	60/120	Xenon Tube	10/7.5	94 150	X300P-22	329-7329
12/24V dc	1.45A/700mA	60/120	Xenon Tube	10/7.5	94 150	X301P-18	329-7305

DOMES NOT SUPPLIED, SHOWN FITTED FOR ILLUSTRATION PURPOSES ONLY, MUST BE ORDERED SEPARATELY. FOR SUITABLE TYPES SEE **PAGE 1322**

SSW336

Mftrs. List No.		Order Code		Price Each			
				1+	5+	10+	25+
Surface Mounting							
X125-55		309-9209					
X125-56		309-9210					
X125-57		309-9222					
X125-58		309-9234					
X200-21		309-9246					
X200-22		309-9258					
X201-18		309-9260					
DIN Stud Mounting							
X300-21		309-9271					
X300-22		309-9283					
X301-18		309-9295					
Pole Mounting							
X300P-21		329-7317					
X300P-22		329-7329					
X301P-18		329-7305					

R200/300 Series — Rotating



- Rotating reflector filament beacons
- 360° visibility
- R200 and 201 suitable for surface, conduit box (BESA) or anti-vibration plate mounting (Order Code **309-9672**)
- R300 and 301 DIN stud mounting
- R300P and 301P pole or conduit end mounting, M12 mounting thread size
- Sealed to **IP65**

Stud mounting dimensions = 3 M6 equi-spaced on 130 pcd


Operating temperature		-35°C to +66°C		DC supply voltage tolerance		±20%	
				AC supply voltage tolerance		-10%/+15%	
Supply Voltage	Current	Rotational Speed (rpm)	Light Source	Base Dimensions H Dia.	Mftrs. List No.	Order Code	
Surface Mounting							
115V ac	550mA	120	Ba15d 60W	49 115	R200-04	309-9386	
230V ac	280mA	120	Ba15d 60W	49 115	R200-05	309-9398	
12V dc	4.6A	160±30	H1 55W Halogen	49 115	R201-13	309-9404	
24V dc	2.9A	160±30	H1 70W Halogen	49 115	R201-14	309-9416	
DIN Stud Mounting							
115V ac	380mA	120	E14 40W	94 150	R300-04	309-9428	
230Vac	180mA	120	E14 40W	94 150	R300-05	309-9430	
12V dc	4.6A	160±30	H1 55W Halogen	94 150	R301-13	309-9441	
24V dc	2.9A	160±30	H1 70W Halogen	94 150	R301-14	309-9453	
Pole Mounting							
115V ac	380mA	120	E14 40W	94 150	R301P-04	329-7287	
230V ac	190mA	120	E14 40W	94 150	R301P-05	329-7299	
12V dc	4.6A	160±30	H1 55W Halogen	94 150	R301P-13	329-7263	
24V dc	2.9A	160±30	H1 70W Halogen	94 150	R301P-14	329-7275	

DOMES NOT SUPPLIED, SHOWN FITTED FOR ILLUSTRATION PURPOSES ONLY, MUST BE ORDERED SEPARATELY. FOR SUITABLE TYPES SEE **PAGE 1322**

SSW337

Mftrs. List No.		Order Code		Price Each			
				1+	5+	10+	25+
Surface Mounting							
R200-04		309-9386					
R200-05		309-9398					
R201-13		309-9404					
R201-14		309-9416					
DIN Stud Mounting							
R300-04		309-9271					
R300-05		309-9283					
R301-13		309-9295					
R301-14		309-9453					
Pole Mounting							
R301P-04		329-7287					
R301P-05		329-7299					
R300P-13		329-7263					
R300P-14		329-7275					

Dome and Beacon Accessories.

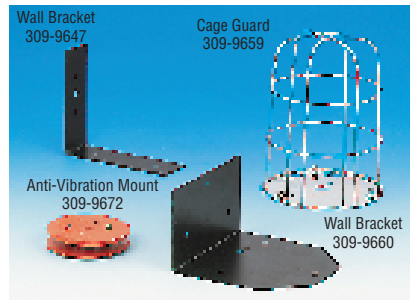

All parts only suitable for Moflash Beacons

Percentage of light passing through the coloured dome

Coloured Domes	Filament	Halogen	Xenon
Clear	100%	100%	100%
Amber	70%	70%	70%
Red	30%	27%	23%
Green	12%	15%	25%
Blue	8%	10%	13%

SSW50X

Dimensions		Mftrs.		Price Each			
				1+	5+	10+	25+
UV Stabilised Polycarbonate Domes							
X125 & SF125 Series							
Amber	102	71	50019BX	309-9544			
Red	102	71	50018BX	309-9556			
Blue	102	71	50020BX	309-9568			
Green	102	71	50021BX	309-9570			
Clear	102	71	50022BX	309-9581			
X200, X201, X300, X301, R200, R201, R300, R301, SF200, SF201, FF125, FF300, FF301, FF400 & FF401 Series							
Amber	156	125	50064BX	309-9593			
Red	156	125	50065BX	309-9600			
Blue	156	125	50066BX	309-9611			
Green	156	125	50067BX	309-9623			
Clear	156	125	50068BX	309-9635			

Mftrs. List No.		Order Code		Price Each			
				1+	5+	10+	25+
Beacon Accessories							
Right Angled Wall Bracket for 125, 200 and 201 Series		50001		309-9647			
Stainless Steel Cage		50002		309-9659			
Guard for 200 and 201 Series		50003		309-9660			
Right Angled Wall Bracket for 300, 301, 400 and 401 Series		50004		309-9660			
Anti-Vibration Mount for 125, 200 and 201 Series		50080		309-9672			
Replacement Bulbs							
E14 x 40W 115V ac		50055		309-9684			
E14 x 40W 230V ac		50056		309-9696			
Ba15d x 60W 115V ac		50028		309-9702			
Ba15d x 60W 230V ac		50029		309-9714			
H1 x 55W Halogen 12V dc		50032		309-9726			
H1 x 70W Halogen 24V dc		50033		309-9738			
Xenon Tube		50034		309-9740			
Ba15d x 21W 12V ac/dc		50040		309-9751			
Ba15d x 21W 24V ac/dc		50041		309-9763			
Ba15d x 15W 115V ac		50042		309-9775			
Ba15d x 15W 230V ac		50043		310-0510			
Ba15s x 5W 12V ac/dc		50050		329-7238			
Ba15s x 5W 24V ac/dc		50051		329-7240			
Ba15s x 10W 12V ac/dc		50087		329-7251			
Ba15s x 10W 24V ac/dc		50088		329-7410			
Ba15s x 10W 230Vac		50089		329-7421			