
Weller

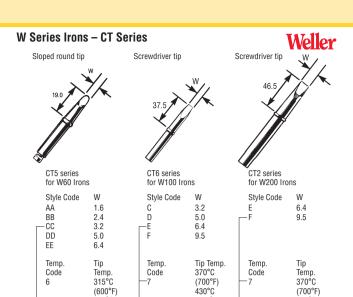

8

(700°F)

430°C (800°F) CT5CC7 fitted as standard

NB: CT5EE6 not available

8


Mftrs. List No.	Order Code	Mftrs. List No.	Order Code	
WILLIS. LIST IVO.	Order Code	WITTIS. LIST IVO.	Order Code	
CT5AA6	416-010	CT6C7	416-150	
CT5AA7	416-022	CT6C8	416-162	
CT5AA8	416-034	CT6D7	416-174	
CT5BB6	416-046	CT6D8	416-186	
CT5BB7	416-058	CT6E7	416-198	
CT5BB8	416-060	CT6E8	416-204	
CT5CC6	416-071	CT6F7	416-253	
CT5CC7	416-083	CT6F8	416-228	
CT5CC8	416-095	CT2E7	416-230	
CT5DD7	416-113	CT2E8	416-241	
CT5DD8	416-125	CT2F7	425-461	
CT5EE7	416-137	CT2F8	416-265	
CT5EE8	416-149			

CT6E7 fitted as standard

					SULU/6
Mftrs.					
List No.	1+	25+	100+	200+	
All CT5 type					
All CT6 type					
All CT2 type					

Iron Stands Standard





8

430°C

(800°F)

Weller

SOI 023

(800°F)

- KH20 for use with HAP1, LR21, T3000 and TCP
- KH6 for use with W61 and W101
- Reinforced spring safety holder to prevent flex tangling in spring Supplied with sponge and cast iron base

Iron Series	Mftrs. List No.	Order Code	Price Each
TCP	KH20	454-734	
T400, W60 & W100	KH6	.419-217	
W201D/E	AK2	971-601	
Sponge (5 pack)	52241999	800-636.	

Weller Low Voltage Irons and Power Supplies

Magnastat Soldering Station - WTCP50



- Controlled through ferro-magnetic sensing
- Soldering temperature set by changing tip
 Station supplied with Pencil, PT-B7 Tip and Support
- P50 will only power TCPS Supplied with UK mains lead
- Lead adaptor required if TCPS iron is to be used with PS-stations

Supply:	230V	Output:	24V 50 Watts			S0L298
					Price Each	
Descri	ption		Order Code	1+	5+	10+
Station	1	WTCP 50	321-2300			
Station	ı (Euro)	WICP 50	401-5198			
Power	Unit	P50	321-2210			
Power	Unit (Euro)	P50	400-6069			
Solder	ing Pencil	TCPS	836-503			
Suppo	rt	KH20	454-734			
Lead A	daptor	0058703915	321-2312			

'Magnastat' Controlled, 45 Watts, 24V ac - TCP UK Version for use with PS2/PS3 Power Supplies



est value



Barrel length (excl tip) = 50, Barrel dia = 9

- Lightweight thermoplastic handle
- Capacitor is incorporated to prolong switch life and eliminate interference
- Compatible with any PS series power supply
- Fitted with a 3 core, 1.5m silicone lead as standard or 3m version available
- Supplied with 'longlife' tip. Order Code 416-290, see Page 1402
- Supplied with a Bulgin 3 pin connector

						SULUU2
Mftrs.			Price	Each		
List No.	Order Code	1+	5+	10+	48+	
0151004199-TCP	.415-522					
0151004299-TCP3M	.415-534					

'Magnastat' Controlled, 35 Watts, 12V dc - TCP-12V For use with Car Battery or 12V Power Supply





Barrel length (excl tip) = 50. Barrel dia = 9

- Operates on 12V dc
- Can be powered from a car battery
- Incoporates all features of standard
- Fitted with 2 core, 1.3m silicone lead
- Supplied without a plug Supplied with 'longlife' tip. Order code 416-290, see **Page 1402**

Note: This item is not to be used with Weller 24V power supplies

SOL004 List No. **Order Code** 10+ 48+ 0151004099 .415-510

Electronically Controlled Iron - T3001

Temtronic soldering pencil Power supply 24V Adjustable temperature from 200°C – 450°C Potential free

Requires ET series tips

SOL299 **Price Each** Power Unit List No. **Order Code** 5+ 10+ 0052400299 321-2336 PS Series 0052400199

continued

Welle1