


## WC100 Iron Tips

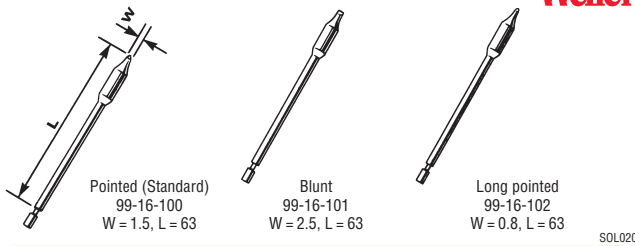

Pointed (Standard) 99-16-100 W = 1.5, L = 63  
 Blunt 99-16-101 W = 2.5, L = 63  
 Long pointed 99-16-102 W = 0.8, L = 63

**Weller**

SOL202

Mfrs. List No.	Order Code	1+	25+	100+	200+
99-16-100	.418-985				
99-16-101	.418-997				
99-16-102	.419-000				

## Soldering Accessories

### Thermometer



- Portable soldering iron thermometer
- 3½ digit display
- Gives accurate indication of tip temperature
- Accepts any suitable K type thermocouple probe via a miniature socket
- Measures temperatures up to 1200°C
- Built in 'Lo Bat' indicator
- Requires PP3 battery (not supplied)
- Supplied with operation manual and carry case


**LABFACILITY**  
TEMPERATURE TECHNOLOGY

Measurement range -50°C to 1200°C

SOL202

Mfrs. List No.	Order Code	1+	5+	10+
TM902C	725-092			

### Soldering Aids

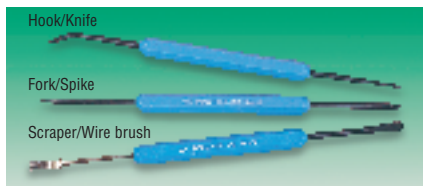

L = 175

- Plastic moulded hexagon handles
- Hardened steel shafts each bearing a formed tool
- Ideal for use in board repair, component replacement and track modification
- Provides a total of six functions. See below


Brush: For cleaning connections before soldering.  
 Scraper: For removing flux residue and surplus solder.  
 Knife: For cutting PCB tracks.  
 Hook: For component and lead extraction.  
 Fork: Fits wire up to 22swg. For wrapping and unwrapping etc.  
 Spike: For hole clearing and marking.

SOL061

Order Code	Price Each
145-462	

## Solder Pots

### Miniature Solder Pot 100W

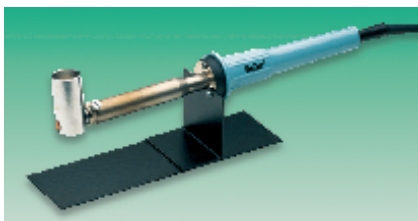

**Weller**

- 100W Solder pot for dip tinning
  - Stable bench support
  - Small pot mass for fast heat up
- Power supply 240V 50Hz Solder Pot Size 17.4mm dia 22mm deep  
 Operating Temperature 330°C Power 100W

SOL221

Type of Mains Plug	Mfrs. List No.	Order Code	1+	5+	10+
Euro Schuko Plug	W101H	800-685			

## Solder Pot



**ANTEX**

- 60W solder pot for dipping and tinning components and wires
- Stable design
- Can be screwed to bench for greater security
- Supplied with UK mains plug

Power supply 240V ac 50Hz  
 Typical operating temperature 330°C  
 Power 60 Watts  
 Solder capacity 17.0cm<sup>3</sup>  
 Leakage 0.15mA at 1250V  
 Tilting ability 45°

H = 126, W = 120, D = 120, Pot Dia = 39

SOL081

Order Code	Price Each
149-800	1+
149-801	5+

## Solder Pot Pellets



- High purity solder pellets
- 63/37 tin-lead eutectic alloy
- Ideal for solder pots or baths

**Multicore**

SOL106

Pack Quantity=1	Order Code	1+	10+	50+
250g Solder Pellets	454-618			

## Desoldering Guns

### Desoldering Pump



**DURATOOL**

**New**

Overall length = 162mm

- Metal construction
- Anti-static tip

TEE490

Order Code	Price Each
312-5634	1+
312-7710	5+
	10+

### Desoldering Pump



**DURATOOL**

**New**

Overall length = 195mm

- Metal construction
- Anti-static tip

TEE431

Order Code	Price Each
312-5646	1+
312-7709	5+
	10+