

Slimline Sharp-tip Test Probe
76-030/76-031



- 4mm slimline probe with a sharp stainless steel tip
- Extended length probe body
- Wire insulated piercing feature
- Sold individually (76-030 red,


- 76-031 black)
- CE marked, meets IEC1010, 1000V, CAT III 20A



T535

	Order Code	1+	5+	10+
76-030 red	342-1673			
76-031 black	342-1685			

Shatter-proof, 4mm



Test probe with elastic shatter-proof insulating sleeve. Insulating and backing layers of printed circuit boards can be penetrated by the slim stainless steel tip. Socket connection for 4mm measuring leads. Working voltage 50V, Current 5A.

Mfrs. List No. PRUF 2 + Colour



T250

	Order Code	1+	20+	100+
Red	523-665			
Black	523-677			

Contact Protected PRUEF2S



- Contact-protected test probe
- Elastic, shatter-proof insulation
- Tip breaks through insulation layers
- 4mm socket

Rated Voltage: 60Vdc
Contact Resistance: 50mΩ
Temperature Range: -25°C to +80°C

Mfrs. List No. 973659-100(black), 973659-101(red)

T461

Colour	Order Code	1+	10+	50+	100+
Black	810-435				
Red	810-447				

Dual Function PRUEF20



- Dual function tip spring steel pin for breaking through insulation layers, multiple-sprung wire for plugging into 4mm socket
- 4mm Socket



Rated Voltage: 60Vdc
Contact Resistance: 15mΩ
Temperature Range: -25°C to +80°C

Mfrs. List No. 973505-100 (black), 973505-101 (red)

T462

Colour	Order Code	1+	10+	50+	100+
Black	810-459				
Red	810-460				

Safety, 4mm Socket 1000V

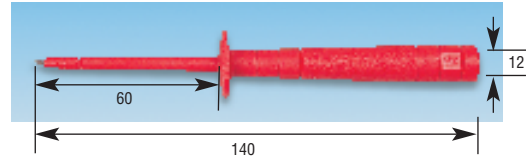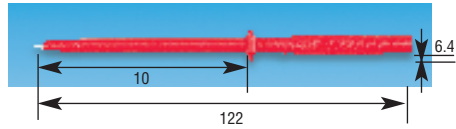

A rigid probe fitted with a 4mm socket to accept shrouded connecting leads and plugs. Each probe features a moulded finger guard/anti-roll body and a refined steel sharp point tip fitted with a removable safety cap. Manufactured to IEC1010-1, VDE0100/0110, approved by BG. Working voltage 1000V.

Mfrs. List No. 24.0235-1 = 152-730, 24.0235-4 = 152-731, 24.0231-1 = 152-732, 24.0231-4 = 152-733

T167

Colour	Order Code	1+	10+	25+
Red (slimline)	152-730			
Black (slimline)	152-731			
Red	152-732			
Black	152-733			

Insulated Probe Sprung Hooks



Features:


- 4mm probe sprung hooks
- 3mm hook opening
- Sold individually (76-032 red, 76-033 black)
- CE marked meets IEC-1010, 500V, CAT I, 5A



T549

	Order Code	1+	5+	10+
76-032 red	342-1697			
76-033 black	342-1703			

Fully Insulated Alligator Clips



Features:

- Fully insulated 4mm alligator clips
- Wire insulated piercing feature
- Sold individually (76-054 red, 76-055 black)
- CE marked meets IEC-1010, 1000V, CAT III, 20A

T548

	Order Code	1+	5+	10+
76-054 red	342-1715			
76-055 black	342-1727			

Call for Latest Pricing

Products on this page may be subject to price changes in line with market trends. Call us for an update on (65) 788 0200.