


Test Leads

Contact Protected  
MLB/1V



- Contact protected measuring lead 1mm<sup>2</sup>
- 4mm diameter plug insulated by latching and sprung insulating sleeve which is only released by pressure on the side-mounted locking spring
- Highly flexible PVC insulation



Rated Voltage: 60Vdc  
Rated Current: 32A  
Temperature Range: -15° to +70°C

Mftrs. List No. 972644 250mm 972645 500mm 972646 1000mm 972647 2000mm  
+ Colour Code: 100(black), 101(red), 102(blue), 103(yellow), 104(green)

T459

Colour	Order Code	Price Each			
		1+	10+	50+	100+
<b>250mm, 8.5mΩ</b>					
Black	810-526				
Red	810-538				
Blue	810-540				
Yellow	400-2957				
Green	400-2969				
<b>500mm, 13mΩ</b>					
Black	810-551				
Red	810-563				
Blue	810-575				
Yellow	400-2970				
Green	400-2982				
<b>1000mm, 22mΩ</b>					
Black	810-587				
Red	810-599				
Blue	810-605				
Yellow	400-2994				
Green	400-6008				
<b>2000mm, 40mΩ</b>					
Black	810-617				
Red	810-629				
Blue	810-630				
Yellow	400-6010				
Green	400-6021				

Stackable 25mm<sup>2</sup>  
ML25/2.5



- Injection-moulded measuring lead
- 4mm diameter plug with caged spring and 4mm diameter socket for tower construction
- Nickel-plated copper beryllium contact spring
- High flexible double insulated stranded lead
- Shatter proof



Rated voltage: 60Vdc  
Rated current: 32A  
Temperature Range: -15°C to +70°C

Mftrs. List No. 972437 250mm 972438 500mm 972439 1000mm 972440 2000mm  
+colour code: 100 (black), 101 (red), 102 (blue), 103 (yellow), 104 (green), 188 (yellow-green)

T460

Colour	Order Code	Price Each			
		1+	10+	50+	100+
<b>250mm, 6mΩ</b>					
Blue	401-7638				
Yellow	401-7640				
Green	401-7651				
Yellow-Green	401-7663				
Red	401-7675				
Black	401-7687				
<b>500m, 8mΩ</b>					
Blue	401-7766				
Yellow	401-7778				
Green	401-7780				
Yellow-Green	401-7791				
Red	401-7808				
Black	401-7810				

	Price Each			
	1+	10+	50+	100+
<b>1000mm, 12mΩ</b>				
Blue	401-7833			
Yellow	401-7845			
Green	401-7857			
Yellow-Green	401-7869			
Red	401-7870			
Black	401-7882			
<b>2000mm, 20mΩ</b>				
Blue	401-7912			
Yellow	401-7924			
Green	401-7936			
Yellow-Green	401-7948			
Red	401-7950			
Black	401-7961			

Safety Alligator Flexible Clip



Features:

- Alligator style contacts can grasp terminals up to 12.7mm diameter
- Insulation on alligator contacts protects against shorting
- CE marked, meets IEC-1010, 1000V, CAT III 6A

T540

	Order Code	Price Each		
		1+	5+	10+
72-062 red	342-1739			
72-063 black	342-1740			

4mm Plug/Cable Entry




Two types are available, flexible shaft which has a clip-on facility or a rigid shaft which has a hook-on facility. Both probes have a sprung easy push button action and are moulded with a 4mm socket which doubles up as a 4mm plug entry or a terminal block for a lead. Working Voltage 50V, Maximum Current 5A.

Mftrs. List No. KLEPS 10 + Colour (Rigid), KLEPS 30 + Colour (Flexible)

T253

	Order Code	Price Each			
		1+	10+	50+	100+
<b>Clip-on (Flexible)</b>					
Red	148-792				
Black	148-793				
<b>Hook-on (Rigid)</b>					
Red	148-794				
Black	148-795				

Safety  
KLEPS2700

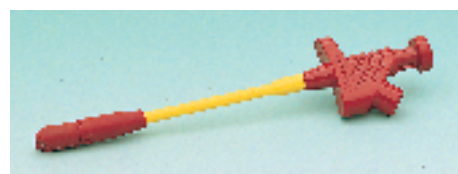

- Safety clamp-type test probe with split test clamps
- Can contact insulated leads with an outer diameter upto 3.5mm
- Displaced insulation at the contact points
- 4mm socket