

Stocked in the following OHMIC Values:



1K = 652-714 5K = 652-738 20K = 652-751 100K = 652-775 1M = 652-799
 2K = 652-726 10K = 652-740 50K = 652-763 500K = 652-787

Mfrs. List No. 3103 + Value eg 310310K = 10K

RP184

Order Multiple=5	Price Each			
Order Code	5+	50+	100+	1000+
All Values				

0.1 Watt – N6 Series 6mm Enclosed

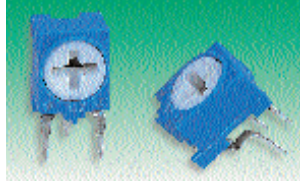

- Low cost fully enclosed
- Carbon on polyester film

- Stable precise resistive track
- Easy to handle design

Power rating @ 40°C 0.1W
 Tolerance ±30%
 Maximum Voltage 100V d.c.
 Contact Resistance Variation 5% or 3Ω whichever is greater
 Rotation (nominal) 245° Mechanical
 Operating temperature -250°C to +70°C

Stocked in the following OHMIC Values:

N6S Side Adjust
 100R = 643-336 1K = 643-361 10K = 643-397 100K = 643-427 1M = 643-452
 220R = 643-348 2K2 = 643-373 22K = 643-403 220K = 643-439
 470R = 643-350 4K7 = 643-385 47K = 643-415 470K = 643-440



N6L Top adjust
 100R = 643-208 1K = 643-233 10K = 643-269 100K = 643-294 1M = 643-324
 220R = 643-210 2K2 = 643-245 22K = 643-270 220K = 643-300
 470R = 643-221 4K7 = 643-257 47K = 643-282 470K = 643-312

Mfrs. List No. N6S + Value, N6L + Value

RP190

Order Multiple=5	Price Each			
Order Code	5+	50+	100+	1000+
All Values				

0.15 Watt – PT10 Series Enclosed Miniature

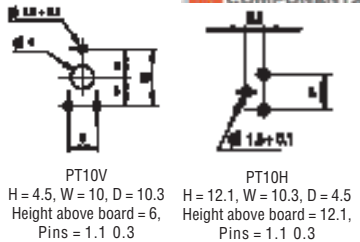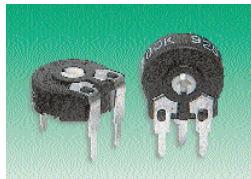

- Low cost linear trimmer, fully enclosed
- Printed carbon resistive track
- Flame retardant to UL94V-0

Power rating @ 40°C 0.15W
 Voltage rating 200V dc or RMS max.
 Resistance tolerance ±20%
 End resistance ≤3%

Contact resistance variation ≤5%
 Temperature coefficient ±1000ppm/°C
 Climatic category 25/70/21
 Operating temperature -25°C to +70°C

Stocked in the following OHMIC Values:

PT10H Vertical mount horizontal adjust
 100R = 614-490 2K2 = 614-531 22K = 614-567 220K = 614-592 2M2 = 614-142
 220R = 614-506 4K7 = 614-543 47K = 614-579 470K = 614-609 4M7 = 614-154
 470R = 614-518 10K = 614-555 100K = 614-580 1M = 614-610 10M = 614-166
 1K = 614-520

PT10V Horizontal mount vertical adjust
 100R = 614-622 2K2 = 614-660 22K = 614-695 220K = 614-725 2M2 = 614-178
 220R = 614-634 4K7 = 614-671 47K = 614-701 470K = 614-737 4M7 = 614-180
 470R = 614-646 10K = 614-683 100K = 614-713 1M = 614-749 10M = 614-191
 1K = 614-658

RP171


Order Multiple=5	Price Each			
Order Code	5+	25+	100+	500+
All Values				

0.15 Watt - PT10M Series



PT10MV top adjust W = 10.3, D = 10.0, H = 4.5
 PT10MH side adjust W = 10.3, D = 4.5, H = 12.1

- Miniature control potentiometers featuring optional plug-in accessories
- Top or side adjustment from both sides
- Hexagonal through hole adjustment

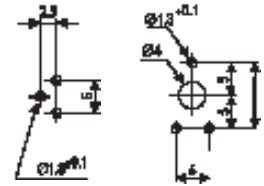

Resistive element Carbon on polyester
 Power rating @ 40°C 0.15W
 Maximum voltage 200V dc
 Resistance tolerance ±20%
 Rotation nominal 220° electrical 235° mechanical
 Rotational life 10,000 operations
 Operating temperature -25°C to +70°C

RP201



Order Multiple=5	Price Each				
Order Code	5+	25+	50+	100+	500+

PT10MV Top Adjust
 1K .868-383
 2K2 .868-395
 4K7 .868-401
 10K .868-413
 47K .868-425
 1M .868-437

PT10MH Side Adjust
 1K .868-449
 2K2 .868-450
 4K7 .868-462
 10K .868-474
 22K .868-486
 100K .868-498

Accessories
 Spindle Black L = 10 .868-504
 Spindle Black L = 25.5 .868-516
 Spindle Black dual L = 12 .868-528
 Edgewheel 21 dia .868-530
 Edgewheel 18 dia .868-541

51 & 53 Series Pluggable Potentiometer



51 Series top adjust H = 8 W = 12.6 D = 16

53 Series side adjust H = 19 W = 12.6 D = 16

- Vertical or horizontal mounting
- Integral support bracket
- Adjustable from both sides
- Optional snap-in spindles and edge wheel

Resistive element Resin base technology Mechanical rotation 300° nominal
 Power rating @ 40°C 0.2Watt Rotational life 15000 operations
 Maximum voltage 500Vdc Operating temperature -25°C to +70°C
 Resistance tolerance ±20%

RP218

Order Code	1+	25+	50+	100+	500+
------------	----	-----	-----	------	------

51 Top adjust
 1K .748-213
 4K7 .748-225
 10K .748-237
 47K .748-249
 100K .748-250

53 Side adjust
 1K .748-262
 4K7 .748-274
 10K .748-286
 47K .748-298
 100K .748-304

Accessories
 30 6mm Black Spindle .748-316
 60 6mm Black spindle .748-328
 25mm Black edge wheel .748-330

continued