



5

4

3

2

1

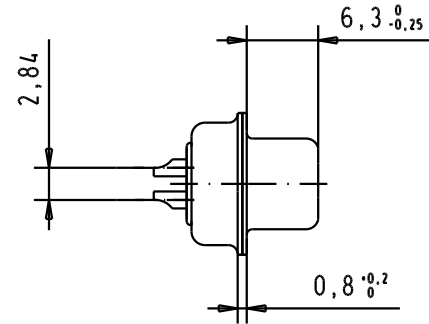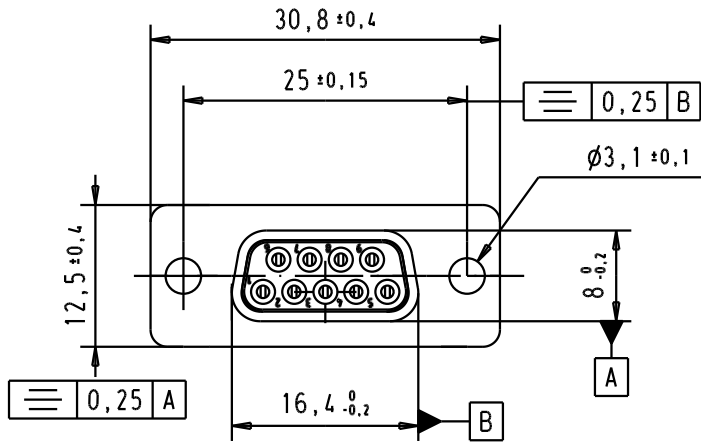


Solder bucket for AWG 20



SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	$47\text{pf} \pm 20\%$
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	$>1G\Omega$

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

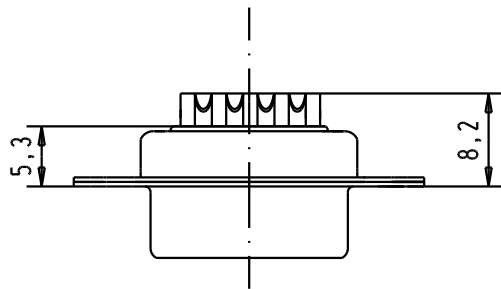

			Dat.		Name				Ma?Ms lab/ Scale		
			Detail.	8-JUL-02	CV		 All Dim. in mm Orig. Size DIN A 4		D-Sub, female, straight 9 Poles, with turned solder bucket, fixing hole 1.5:1		
			Insp.								
			Stand.								
32802	11/07/05	JMDR	HARTING EURL F-95972 Paris 					TB 09641117210 Sub.		Blatt/ Page 1 / 1	
31058	8-JUL-02	CV									
Mod.	Dat.	Name									