



HEATSINKS


Undrilled




170-761 5.7°C/W
H=15.9, W=63.5, D=50
170-089 3.9°C/W
H=15.9, W=63.5, D=100
170-762 3.0°C/W
H=15.9, W=63.5, D=150

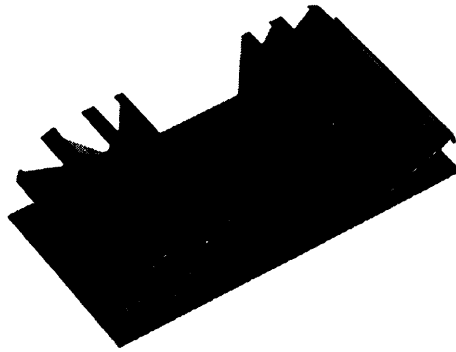

170-763 2.8°C/W
H=25.9, W=104.8, D=50
170-764 1.8°C/W
H=25.9, W=104.8, D=100
170-765 1.5°C/W
H=25.9, W=104.8, D=150



170-088 3.4°C/W
H=16, W=60, D=89

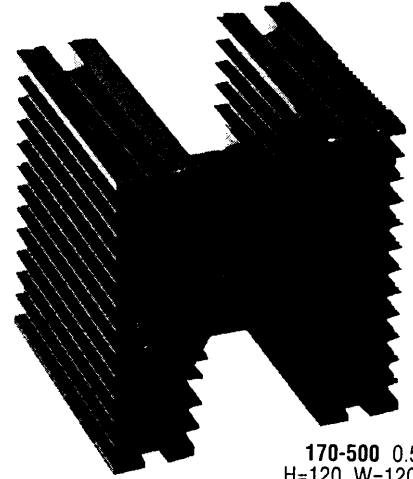

170-500 0.5°C/W
H=120, W=120, D=115

TO-220/TO-218




TO-220
170-072 21°C/W
H=19, W=22, D=19
170-073 30°C/W
H=11, W=22, D=19
Hole dia=4




TO-220/TO-218
177-009 24°C/W
H=10.2, W=31.7, D=17.8
Hole dia=3.7

Undrilled with Tee-Slots

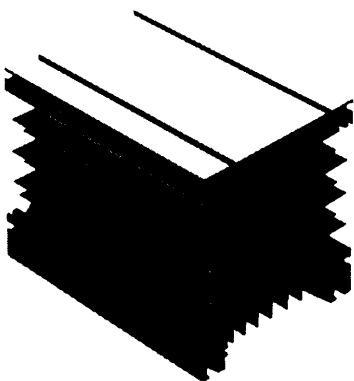


170-753 0.33°C/W
H=135, W=125, D=180
Slot spacing=80

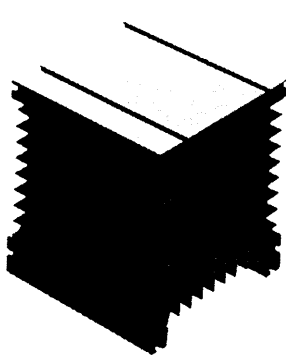

179-955 0.41°C/W
H=135, W=125, D=120
179-956 0.32°C/W
H=135, W=125, D=180
Slot spacing=80

Top surface machined flat for solid state relays, power modules and stud devices.


Comb Section

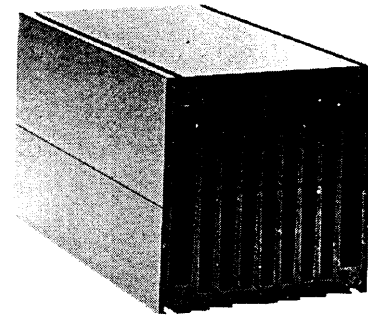

Fin-to-Fin Assembly

Two sections may be assembled fin-to-fin, providing a highly efficient force cooled assembly.

Thermal Resistance (°C/W)	H	W	D	Order Code
0.63	64.5	119	200	526-812
0.48	64.5	119	300	526-915

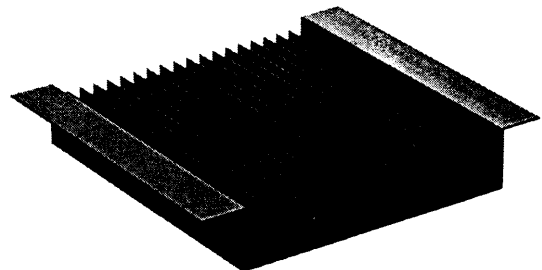

253-601 0.62°C/W H=30, W (body)=200, W (overall)=240, D=200
253-613 0.40°C/W H=46, W (body)=200, W (overall)=240, D=150
253-625 0.32°C/W H=46, W (body)=200, W (overall)=240, D=250

NOTE: Heatsinks are black anodised unless otherwise stated.