

Axial Lead and Cartridge Fuses

Designed to IEC Standard

5 x 20 mm Time Lag Fuse (Slo-Blo®) Fuse 219 Series



- Designed to International (IEC) Standards for use globally.
- Meets the IEC 60127-2, Sheet 6 specification for Time Lag Fuses.
- Available in Cartridge and Axial Lead Format.
- Available in ratings of 1.0 to 6.3 amperes.
- Enhanced Breaking Capacity, medium I²t

ELECTRICAL CHARACTERISTICS:

| % of Ampere Rating | Opening Time |
|--------------------|-----------------------------------------------|
| 150% | 60 minutes, Minimum |
| 210% | 2 minutes, Maximum |
| 275% | 0.6 sec., Min. ; 10 sec. Max |
| 400% | .15 sec., Min. ; 3 sec. Max |
| 1000% | 0.02 sec., Min. ; 0.3 sec. Max. |



AGENCY APPROVALS: Sheet 6 IEC 60127: SEMKO, BSI, METI, CCC, K Mark and VDE approved 1A-6.3A. Recognized 1A to 6.3A under the components program of Underwriters Laboratories and recognized by CSA. METI A 1A to 6.3A.

INTERRUPTING RATINGS: 150 amperes @ 250VAC, unity power factor


PACKAGING: For Axial Leads add packaging suffix XE.

ORDERING INFORMATION:

| Catalog Number | Ampere Rating | Nominal Voltage Rating | Nominal Resistance Cold Ohms | Nominal Melting I ² t A ² Sec |
|----------------|---------------|------------------------|------------------------------|-----------------------------------------------------|
| 0219 001. | 1 | 250 | 0.055 | 3.33 |
| 0219 1.25 | 1.25 | 250 | 0.042 | 5.80 |
| 0219 01.6 | 1.6 | 250 | 0.032 | 10.61 |
| 0219 002. | 2 | 250 | 0.029 | 14.80 |
| 0219 02.5 | 2.5 | 250 | 0.022 | 23.85 |
| 0219 3.15 | 3.15 | 250 | 0.017 | 39.20 |
| 0219 004. | 4 | 250 | 0.013 | 70.95 |
| 0219 005. | 5 | 250 | 0.010 | 114.0 |
| 0219 06.3 | 6.3 | 250 | 0.0075 | 204.0 |

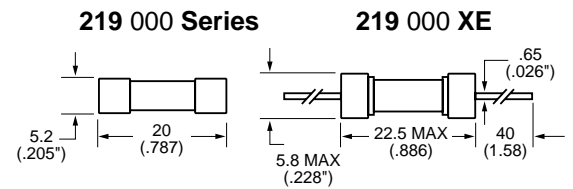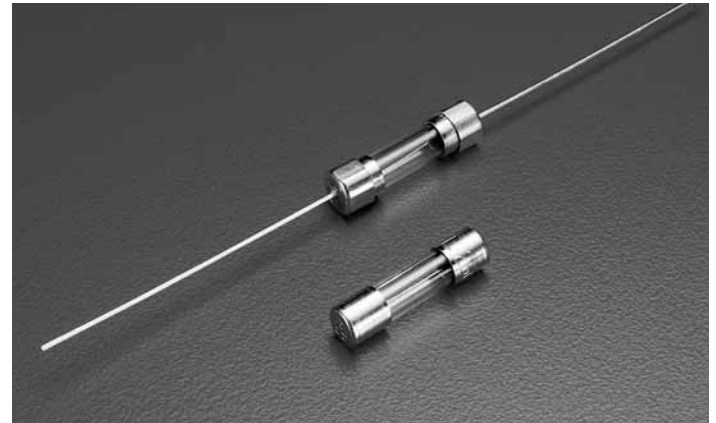

Average Time Current Curves

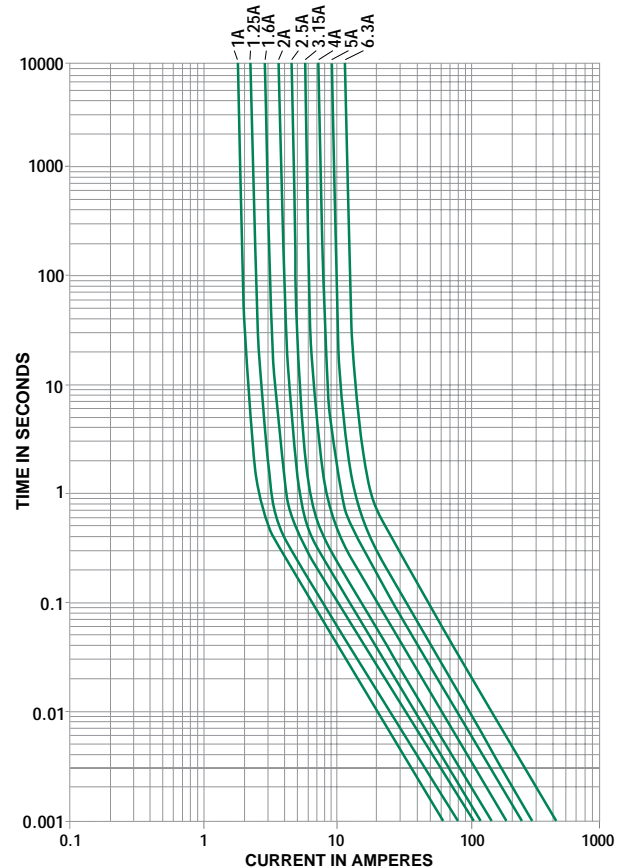

11
AXIAL LEAD AND
CARTRIDGE FUSES



Littelfuse®

**5x20mm Time Lag Fuse
219 Series (Slo-Blo® Type Fuse)**

