
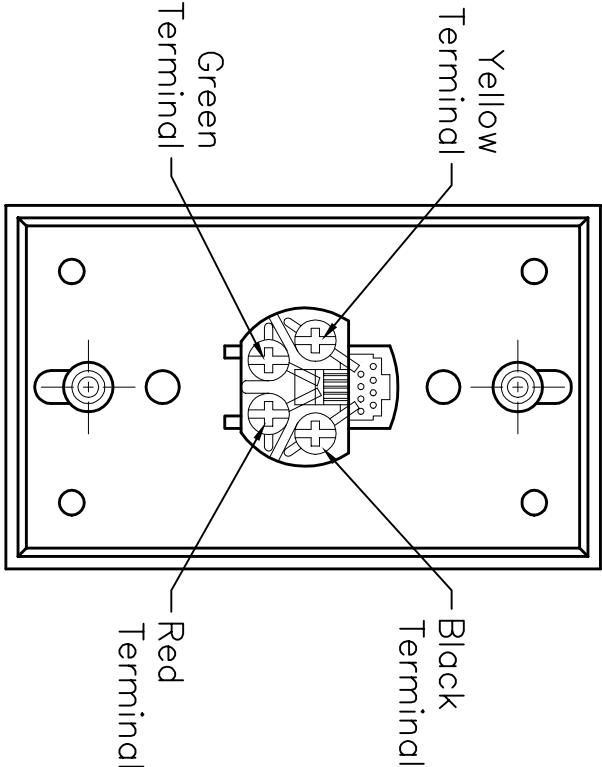


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
788	A	RELEASED	HYO	3/7/01	JC	5/18/01	DJC	5/18/01

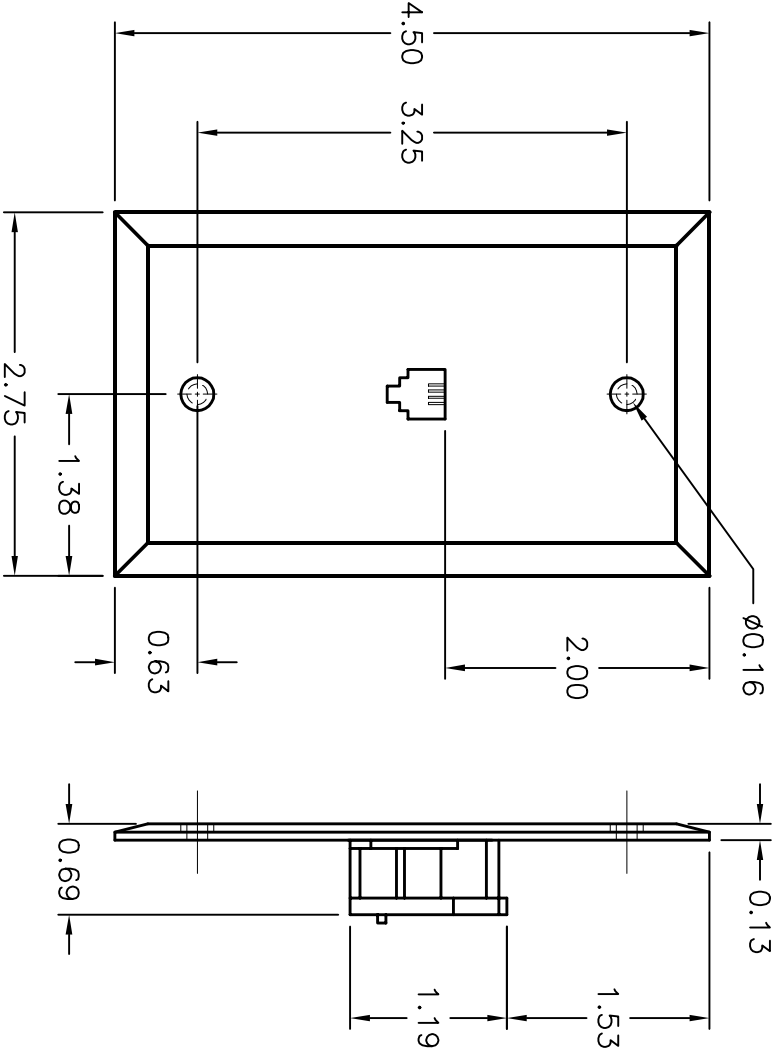

SPECIFICATIONS:

1. CONNECTOR: 6 POSITION / 4 CONDUCTOR
2. LEADWIRE: 26 AWG, 7 STRAND
3. LEADWIRE COLORS: BLACK, RED, GREEN, YELLOW
4. SPRING WIRE: .45mm (0.018 in) DIAMETER, PHOSPHOROUS BRONZE ALLOY
5. HOUSING MATERIAL: ABS AND POLYCARBONATE
6. COLOR: WHITE
7. HARDWARE: (2) #8-32 MACHINE SCREWS

8. INSULATION RESISTANCE: ≥ 500 MEGOHMS
9. DIELECTRIC STRENGTH: 500 VAC RMS, 60 Hz
10. CONTACT RESISTANCE: ≤ 15 MILLIOHMS
11. CURRENT RATING: $1\frac{1}{2}$ AMPS
12. RETENTION FORCE: 76 N (17 lbs)
13. CRIMPING STRENGTH: 2.0 Kg (4.4 lbs)

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

DRAWN BY:

HISHAM ODISH

DATE:

3/7/01

CHECKED BY:

JOHN COLE

DATE:

5/18/01

APPROVED BY:

DANIEL CAREY

DATE:

5/18/01

DRAWING TITLE:

Molded Plastic, 4 Conductors Telephone Wall Plate

SIZE DWG. NO.

A 8588-0063

ELECTRONIC FILE

52N9420.DWG

REV

A